

# Technical data

## RNA4900LL/3AS

Needle roller bearing, machined-ring, without inner ring



## Visual(s)

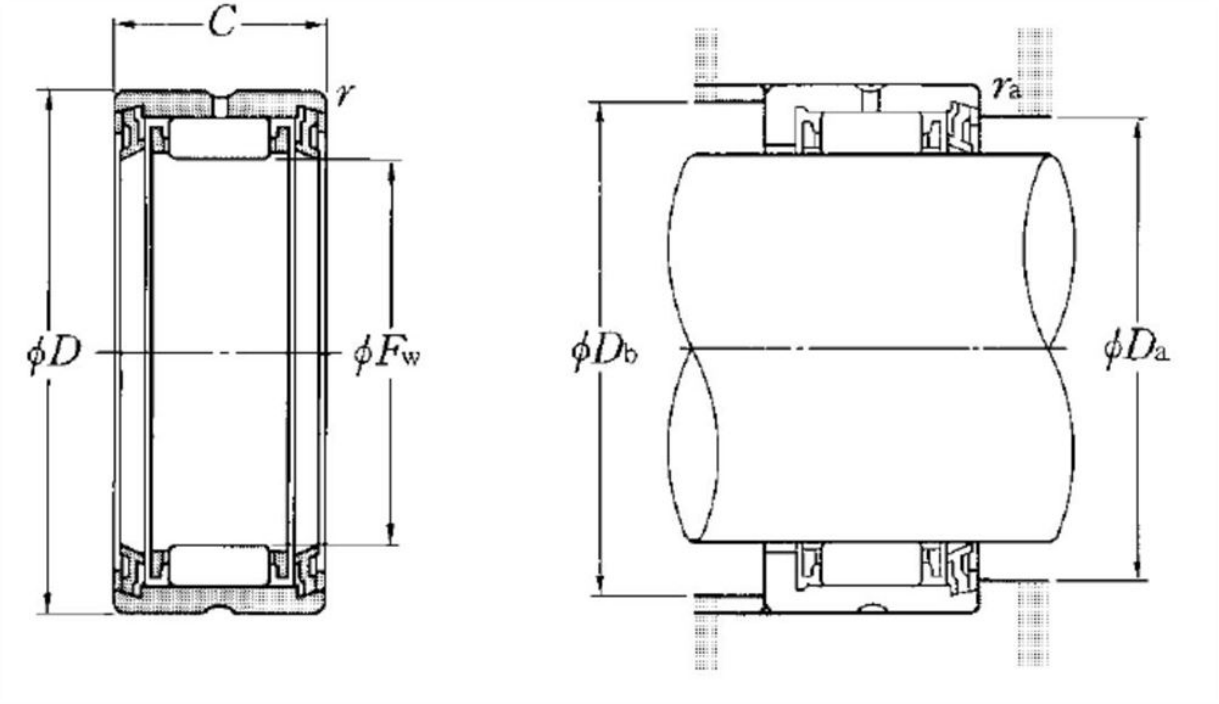


## Product definition

| | |
|---|---|
| **Fw** | 14 mm |
| **D** | 22 mm |
| **C** | 13 mm |
| **rs min** | 0.3 mm |
| **Dw** | 2 mm |
| **Lw** | 7.3 mm |
| **Lubrication hole on outer ring** | Oui/Yes |
| **k** | 2.5 mm |
| **Radial clearance class** | CN |
| **Precision class** | P0 |
| **Mass** | 0.02 kg |
| **Brand** | NTN |

## Product performance

| | |
|---|---|
| **Cr** | 7.2 kN |
| **C0r** | 8.5 kN |
| **Nlim (grease)** | 10,000 Tr/min |
| **Min operating temperature, Tmin** | -20 °C |
| **Max operating temperature, Tmax** | 100 °C |
| **Characteristic cage frequency, FTF** | 0.44 Hz |
| **Characteristic rolling element frequency, BSF** | 7.88 Hz |
| **Characteristic outer ring frequency, BPF0** | 7 Hz |
| **Characteristic inner ring frequency, BPFI** | 9 Hz |

## Abutment dimensions

| | |
|---|---|
| **Da max** | 16 mm |
| **Db max** | 20 mm |
| **ras max** | 0.3 mm |