
Technical data


RNA4926

Needle roller bearing, machined-ring, without inner ring



Needle roller bearing, machined-ring, without inner ring, double-side ribs, lubrication hole

Visual(s)

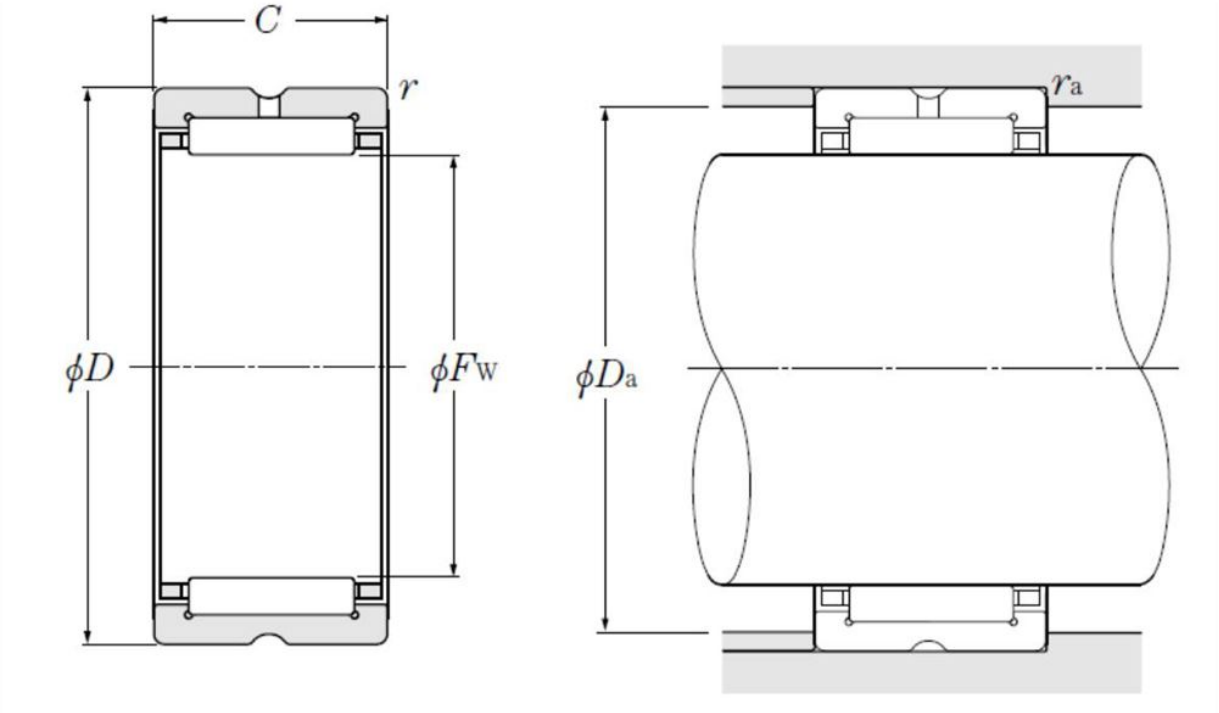

Product definition

Fw	150 mm
D	180 mm
C	50 mm
rs min	1.5 mm
Dw	9 mm
Lw	40 mm
Lubrication hole on outer ring	Oui/Yes
k	3.5 mm
Radial clearance class	CN
Precision class	P0
Mass	2.21 kg
Brand	NTN

Product performance

Cr	202 kN
C0r	455 kN
Nlim (grease)	1,800 Tr/min
Nlim (oil)	2,700 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.47 Hz
Characteristic rolling element frequency, BSF	17.61 Hz
Characteristic outer ring frequency, BPF0	15.09 Hz
Characteristic inner ring frequency, BPFI	16.91 Hz

Abutment dimensions

Da max	172 mm
ras max	1.5 mm