Technical data

10X22206EAW33EE


Double row spherical roller bearings




Spherical roller bearing, pressed steel cage, groove and lubrication holes on outer ring, non ISO width, contact seals on both sides

ULTAGE

Visual(s)

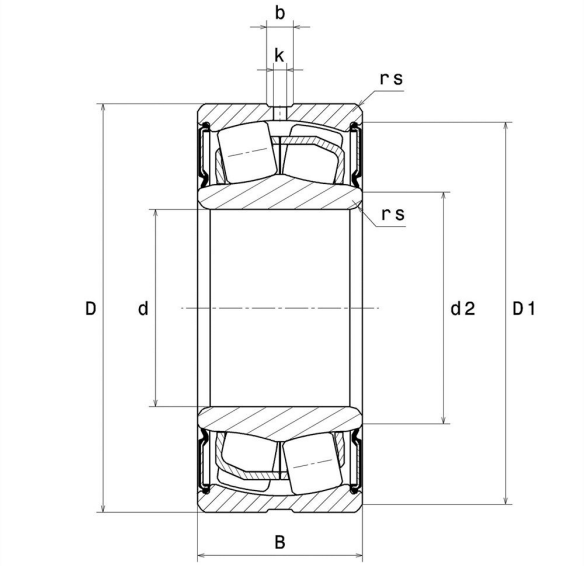

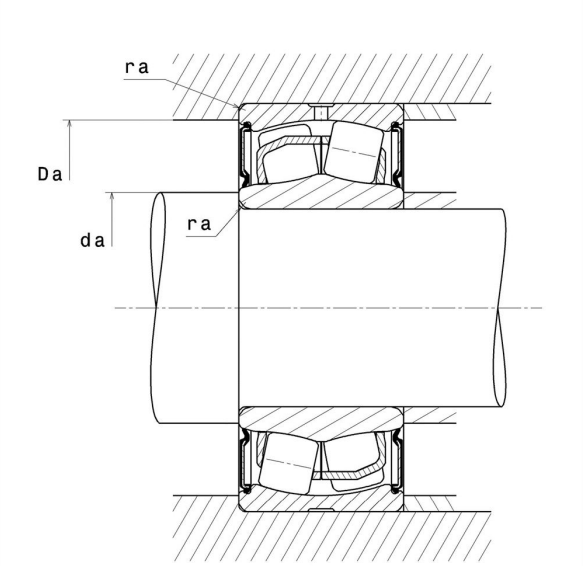

Product definition

d	30 mm
D	62 mm
B	25 mm
d2	35.2 mm
D1	56.4 mm
rs min	1 mm
Number of lubrication holes	3
b	4.4 mm
k	2 mm
Associated sleeve reference	P0
e	0.31
Y1	2.15
Y2	3.2
Y0	2.1
Radial clearance class	CN
Mass	0.33 kg
Brand	SNR

Product performance

Dynamic load, C	75.7 kN
Static load, C0	64.5 kN
Fatigue limit load, Cu	6.65 kN
Nref	75 Tr/min
Nlim	3,100 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.41 Hz
Characteristic rolling element frequency, BSF	5.26 Hz
Characteristic outer ring frequency, BPF0	6.15 Hz
Characteristic inner ring frequency, BPFI	8.85 Hz

Abutment dimensions

da min	35.2 mm
da max	35.2 mm
db min	35.2 mm
Da max	56.4 mm
ra max	1 mm

Calculation factors

Equivalent dynamic radial load

$P = X.Fr + Y.Fa$

Fa / Fr ≤ e		Fa / Fr > e	
X	Y	X	Y
1	Y1	0.67	Y2

Equivalent static radial load

$P_0 = X_0.Fr + Y_0.Fa$

X_0	Y_0
1	Y0

The values for e, Y1, Y2 and Y0 are shown in the above table .