
Technical datasheet


1203G15


Double row self aligning ball bearings



Self-aligning ball bearing, polyamide cage, open

Visual(s)

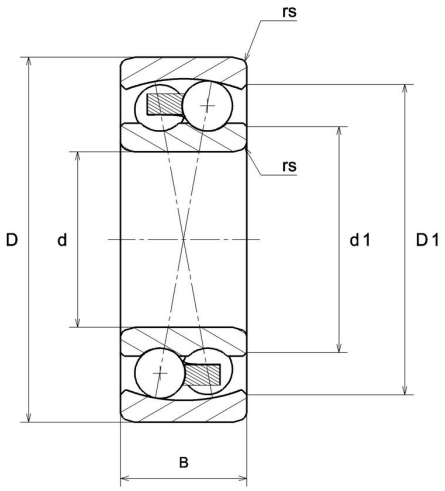

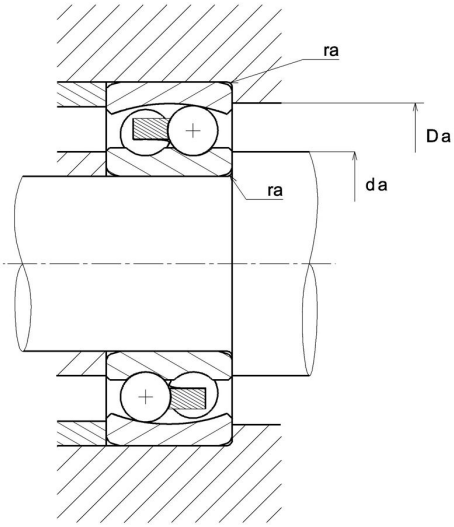

Product definition

d	17 mm
D	40 mm
B	12 mm
d1	23.7 mm
D1	31.7 mm
rs min	0.6 mm
e	0.33
Y1	1.94
Y2	2.99
Y0	2.03
Radial clearance class	CN
Precision class	P0
Mass	0.07 kg
Brand	SNR

Product performance

Dynamic load, C	7.9 kN
Static load, C0	2.01 kN
Nref	17,000 rpm
Nlim	25,000 rpm
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.4 Hz
Characteristic rolling element frequency, BSF	4.78 Hz
Characteristic outer ring frequency, BPF0	4.82 Hz
Characteristic inner ring frequency, BPFI	7.18 Hz

Abutment dimensions

da min	21 mm
Da max	36 mm
ra max	0.6 mm