Technical datasheet


1218C3


Double row self aligning ball bearings

Self-aligning ball bearing, pressed steel cage, open



Visual(s)

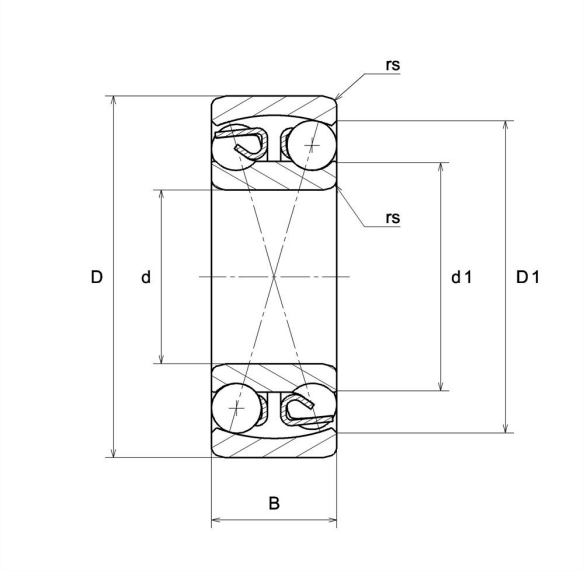

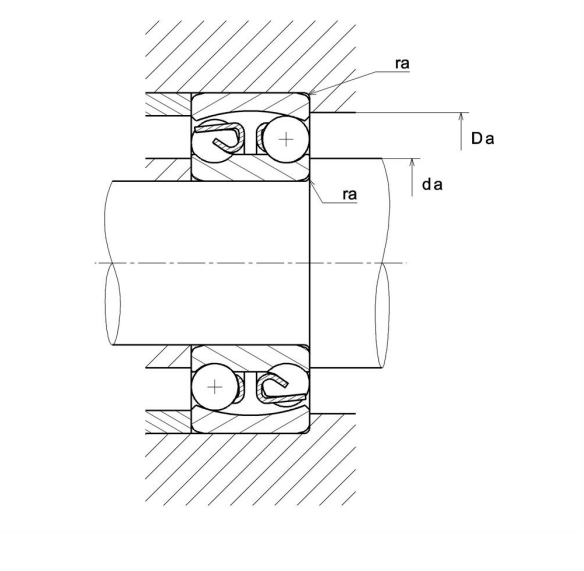

Product definition

d	90 mm
D	160 mm
B	30 mm
d1	112.7 mm
D1	138.2 mm
rs min	2 mm
e	0.17
Y1	3.76
Y2	5.81
Y0	3.93
Radial clearance class	C3
Precision class	P0
Mass	2.52 kg
Brand	SNR

Product performance

Dynamic load, C	56.4 kN
Static load, C0	23.5 kN
Nref	4,800 rpm
Nlim	5,400 rpm
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.44 Hz
Characteristic rolling element frequency, BSF	7.74 Hz
Characteristic outer ring frequency, BPF0	8.3 Hz
Characteristic inner ring frequency, BPFI	10.7 Hz

Abutment dimensions

da min	99 mm
Da max	151 mm
ra max	2 mm