Technical data

21308.VKC3


Double row spherical roller bearings



Spherical roller bearing, pressed steel cage, tapered bore 1:12

ULTAGE

Visual(s)

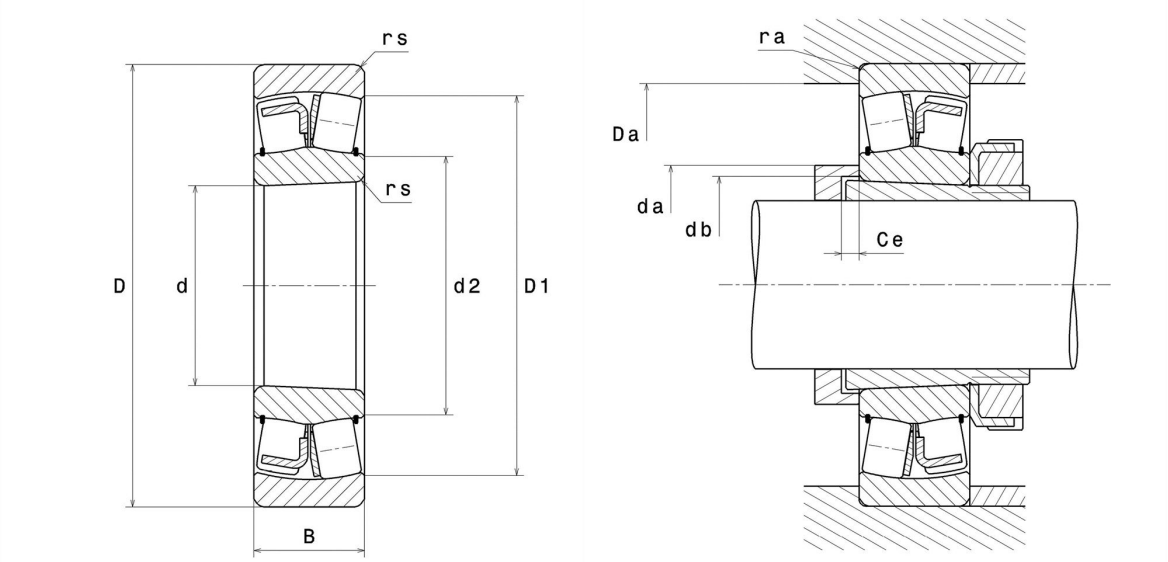

Product definition

d	40 mm
D	90 mm
B	23 mm
d2	53.5 mm
D1	75.4 mm
rs min	1.5 mm
Number of lubrication holes	0
b	2 mm
k	0 mm
Associated sleeve reference	H308
e	0.26
Y1	2.55
Y2	3.8
Y0	2.5
Radial clearance class	C3
Mass	0.7 kg
Brand	SNR

Product performance

Dynamic load, C	7.3 kN
Static load, C0	84.4 kN
Fatigue limit load, Cu	11.1 kN
Nref	6,400 Tr/min
Nlim	9,300 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	200 °C
Characteristic cage frequency, FTF	0.41 Hz
Characteristic rolling element frequency, BSF	5.56 Hz
Characteristic outer ring frequency, BPF0	5.8 Hz
Characteristic inner ring frequency, BPFI	8.2 Hz

Abutment dimensions

da min	49 mm
da max	1.5 mm
db min	44 mm
Ce min	5 mm
Da max	81 mm
ra max	1.5 mm

Calculation factors

Equivalent dynamic radial load

$P = X.Fr + Y.Fa$

$Fa/Fr \leq e$		$Fa/Fr > e$	
X	Y	X	Y
1	Y1	0.67	Y2

Equivalent static radial load

$P_0 = X_0.Fr + Y_0.Fa$

X_0	Y_0
1	Y0

The values for e, Y1, Y2 and Y0 are shown in the above table .