Technical datasheet


2213K

Double row self aligning ball bearings



Self-aligning ball bearing, pressed steel cage, tapered bore, open

Visual(s)

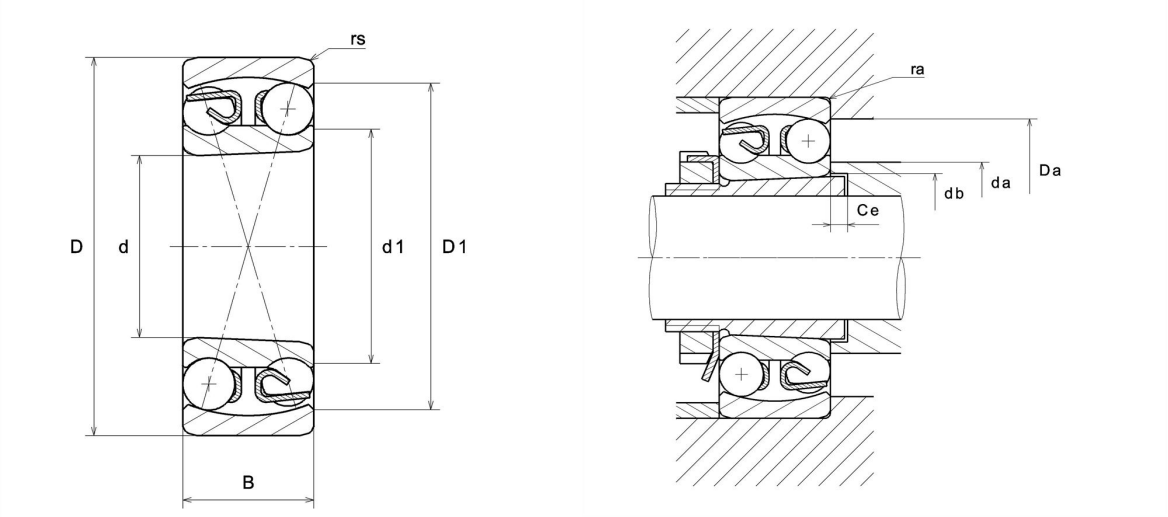

Product definition

d	65 mm
D	120 mm
B	31 mm
d1	82.2 mm
D1	102.4 mm
rs min	1.5 mm
Associated sleeve reference	H313
e	0.28
Y1	2.23
Y2	3.45
Y0	2.34
Radial clearance class	CN
Precision class	P0
Mass	1.42 kg
Brand	SNR

Product performance

Dynamic load, C	43 kN
Static load, C0	16.4 kN
Fatigue limit load, Cu	3.6 kN
Nref	6,400 rpm
Nlim	7,100 rpm
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.43 Hz
Characteristic rolling element frequency, BSF	6.67 Hz
Characteristic outer ring frequency, BPF0	7.7 Hz
Characteristic inner ring frequency, BPFI	10.3 Hz

Abutment dimensions

da min	73 mm
da max	79 mm
db min	70 mm
Ce min	8 mm
Da max	112 mm
ra max	1.5 mm