Technical data

22207EAKW33C4


Double row spherical roller bearings



Spherical roller bearing, pressed steel cage, groove and lubrication holes on outer ring, tapered bore 1:12

ULTAGE

Visual(s)

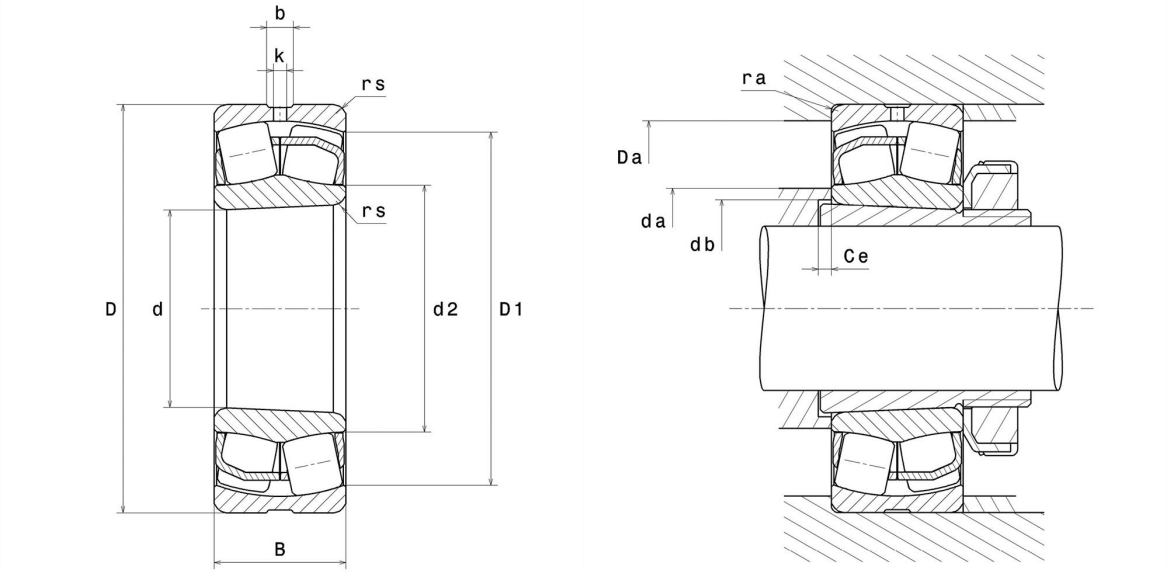

Product definition

d	35 mm
D	72 mm
B	23 mm
d2	45.1 mm
D1	63 mm
rs min	1.1 mm
Number of lubrication holes	3
b	4.9 mm
k	2 mm
Associated sleeve reference	H307
e	0.31
Y1	2.21
Y2	3.29
Y0	2.16
Radial clearance class	C4
Mass	0.42 kg
Brand	SNR

Product performance

Dynamic load, C	100 kN
Static load, C0	92 kN
Fatigue limit load, Cu	8.65 kN
Nref	9,500 Tr/min
Nlim	12,000 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	200 °C
Characteristic cage frequency, FTF	0.42 Hz
Characteristic rolling element frequency, BSF	5.75 Hz
Characteristic outer ring frequency, BPF0	6.68 Hz
Characteristic inner ring frequency, BPFI	9.32 Hz

Abutment dimensions

da min	42 mm
da max	1 mm
db min	39 mm
Ce min	5 mm
Da max	65 mm
ra max	1 mm

Calculation factors

Equivalent dynamic radial load

$P = X.Fr + Y.Fa$

$Fa/Fr \leq e$		$Fa/Fr > e$	
X	Y	X	Y
1	Y1	0.67	Y2

Equivalent static radial load

$P_0 = X_0.Fr + Y_0.Fa$

X_0	Y_0
1	Y0

The values for e, Y1, Y2 and Y0 are shown in the above table .