Technical data

22211.EAC3


Double row spherical roller bearings


Spherical roller bearing, pressed steel cage

ULTAGE



Visual(s)

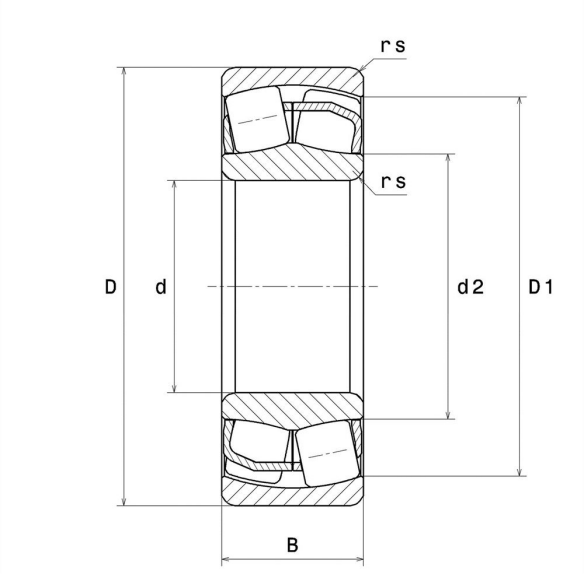

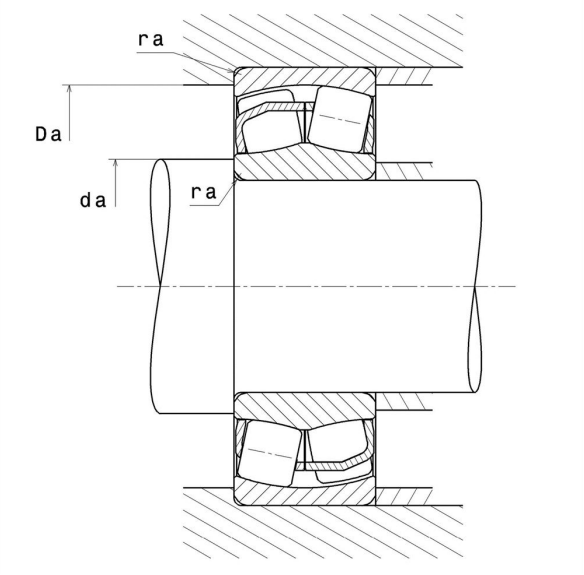

Product definition

d	55 mm
D	100 mm
B	25 mm
d2	66 mm
D1	89.7 mm
rs min	1.5 mm
Number of lubrication holes	0
b	2 mm
k	0 mm
Associated sleeve reference	P0
e	0.23
Y1	2.95
Y2	4.39
Y0	2.89
Radial clearance class	C3
Mass	0.82 kg
Brand	SNR

Product performance

Dynamic load, C	155 kN
Static load, C0	148 kN
Fatigue limit load, Cu	17.9 kN
Nref	6,100 Tr/min
Nlim	8,200 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	200 °C
Characteristic cage frequency, FTF	0.42 Hz
Characteristic rolling element frequency, BSF	6.29 Hz
Characteristic outer ring frequency, BPF0	7.62 Hz
Characteristic inner ring frequency, BPFI	10.38 Hz

Abutment dimensions

da min	64 mm
da max	1.5 mm
Da max	91 mm
ra max	1.5 mm

Calculation factors

Equivalent dynamic radial load

$P = X.Fr + Y.Fa$

$Fa/Fr \leq e$		$Fa/Fr > e$	
X	Y	X	Y
1	Y1	0.67	Y2

Equivalent static radial load

$P_0 = X_0.Fr + Y_0.Fa$

X_0	Y_0
1	Y0

The values for e, Y1, Y2 and Y0 are shown in the above table .