Technical data

22226.EAW33C5


Double row spherical roller bearings

Spherical roller bearing, pressed steel cage, groove and lubrication holes on outer ring

ULTAGE



Visual(s)

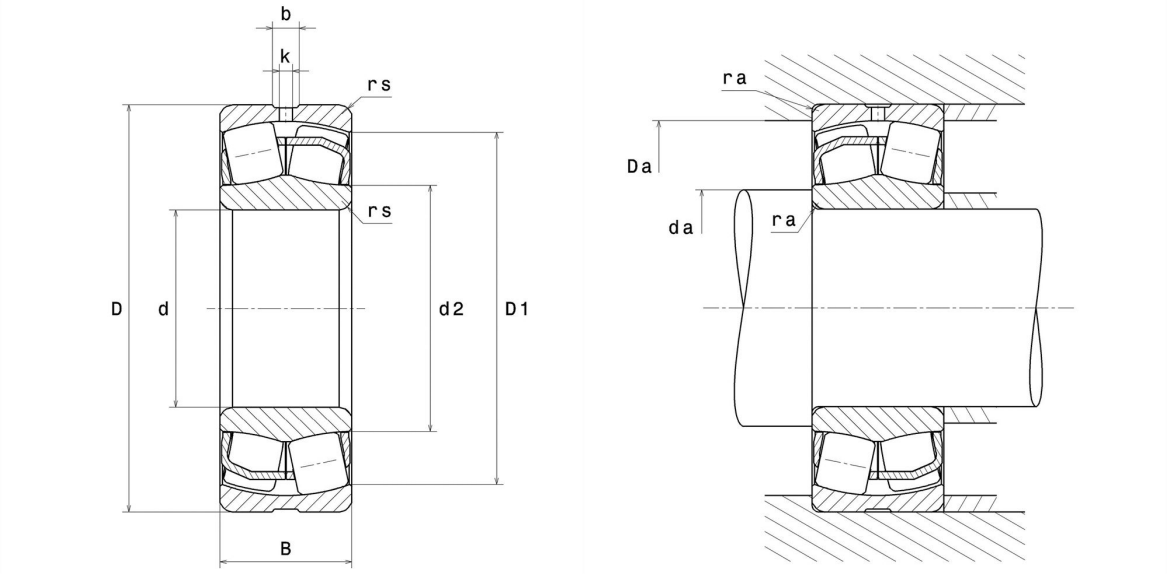

Product definition

d	130 mm
D	230 mm
B	64 mm
d2	151.4 mm
D1	205.4 mm
rs min	3 mm
Number of lubrication holes	3
b	13.2 mm
k	6 mm
Associated sleeve reference	P0
e	0.25
Y1	2.69
Y2	4
Y0	2.63
Radial clearance class	C5
Mass	10.77 kg
Brand	SNR

Product performance

Dynamic load, C	808 kN
Static load, C0	898 kN
Fatigue limit load, Cu	80.8 kN
Nref	2,800 Tr/min
Nlim	3,600 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	200 °C
Characteristic cage frequency, FTF	0.42 Hz
Characteristic rolling element frequency, BSF	6.21 Hz
Characteristic outer ring frequency, BPF0	7.61 Hz
Characteristic inner ring frequency, BPFI	10.39 Hz

Abutment dimensions

da min	144 mm
da max	2.5 mm
Da max	216 mm
ra max	2.5 mm

Calculation factors

Equivalent dynamic radial load

$P = X.Fr + Y.Fa$

$Fa/Fr \leq e$		$Fa/Fr > e$	
X	Y	X	Y
1	Y1	0.67	Y2

Equivalent static radial load

$P_0 = X_0.Fr + Y_0.Fa$

X_0	Y_0
1	Y0

The values for e, Y1, Y2 and Y0 are shown in the above table .