Technical data

22232.EAKW33C4


Double row spherical roller bearings



Spherical roller bearing, pressed steel cage, groove and lubrication holes on outer ring, tapered bore 1:12

ULTAGE

Visual(s)

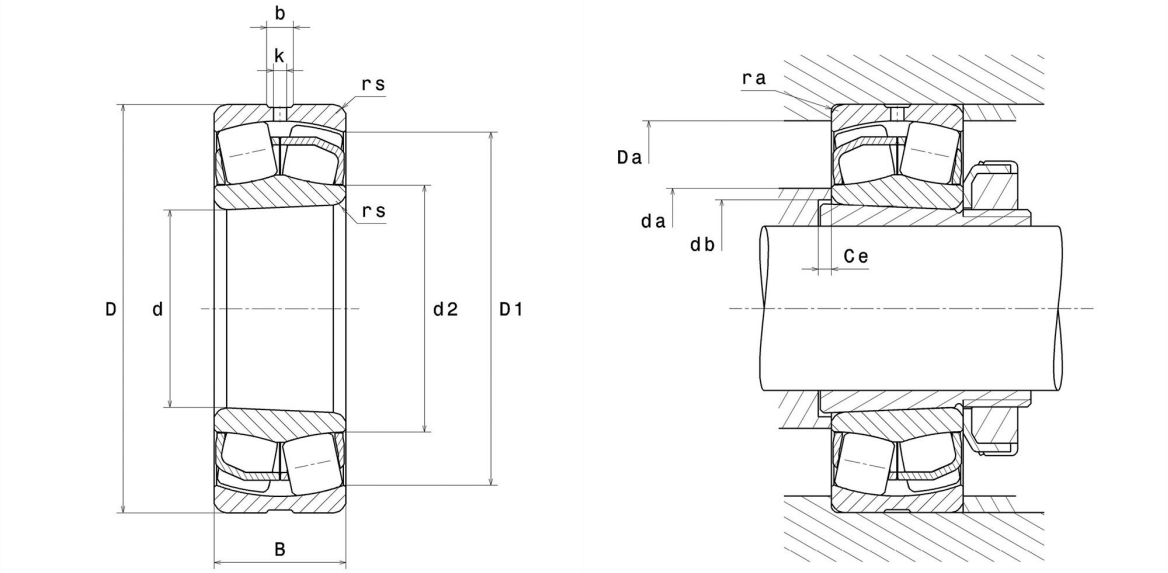

Product definition

d	160 mm
D	290 mm
B	80 mm
d2	190 mm
D1	258.7 mm
rs min	3 mm
Number of lubrication holes	3
b	16.9 mm
k	8 mm
Associated sleeve reference	H3132
e	0.25
Y1	2.69
Y2	4
Y0	2.63
Radial clearance class	C4
Mass	22.8 kg
Brand	SNR

Product performance

Dynamic load, C	1,220 kN
Static load, C0	1,390 kN
Fatigue limit load, Cu	120 kN
Nref	2,000 Tr/min
Nlim	2,800 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	200 °C
Characteristic cage frequency, FTF	0.42 Hz
Characteristic rolling element frequency, BSF	6.17 Hz
Characteristic outer ring frequency, BPF0	7.6 Hz
Characteristic inner ring frequency, BPFI	10.4 Hz

Abutment dimensions

da min	174 mm
da max	2.5 mm
db min	170 mm
Ce min	14 mm
Da max	276 mm
ra max	2.5 mm

Calculation factors

Equivalent dynamic radial load

$P = X.Fr + Y.Fa$

$Fa/Fr \leq e$		$Fa/Fr > e$	
X	Y	X	Y
1	Y1	0.67	Y2

Equivalent static radial load

$P_0 = X_0.Fr + Y_0.Fa$

X_0	Y_0
1	Y0

The values for e, Y1, Y2 and Y0 are shown in the above table .