Technical data

22320.EK.F800


Double row spherical roller bearings



Spherical roller bearing for vibratory applications, one-piece machined cage, groove and lubrication holes on outer ring, tapered bore 1:12, special C4 class clearance

ULTAGE

Visual(s)

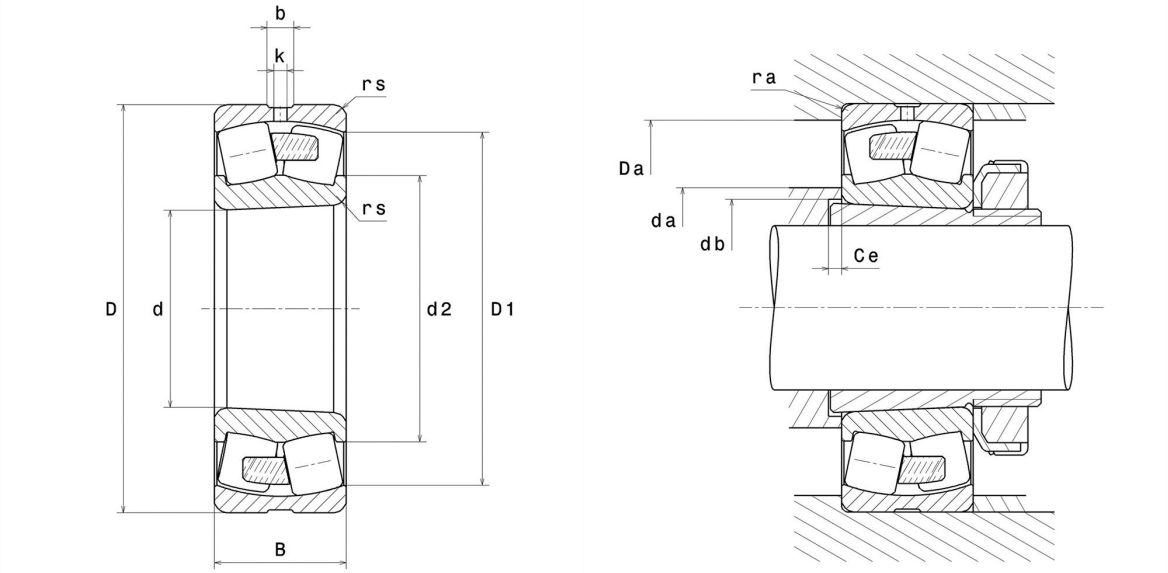

Product definition

d	100 mm
D	215 mm
B	73 mm
d2	126.7 mm
D1	186.7 mm
rs min	3 mm
Number of lubrication holes	3
b	13.3 mm
k	6 mm
Associated sleeve reference	H2320
e	0.34
Y1	1.98
Y2	2.94
Y0	1.93
Radial clearance class	C4 Special
Mass	12.55 kg
Brand	SNR

Product performance

Dynamic load, C	827 kN
Static load, C0	844 kN
Fatigue limit load, Cu	72.4 kN
Nref	2,600 Tr/min
Nlim	3,100 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	200 °C
Characteristic cage frequency, FTF	0.4 Hz
Characteristic rolling element frequency, BSF	4.96 Hz
Characteristic outer ring frequency, BPF0	6.08 Hz
Characteristic inner ring frequency, BPFI	8.92 Hz

Abutment dimensions

da min	114 mm
da max	2.5 mm
db min	110 mm
Ce min	7 mm
Da max	201 mm
ra max	2.5 mm

Calculation factors

Equivalent dynamic radial load

$P = X.Fr + Y.Fa$

$Fa/Fr \leq e$		$Fa/Fr > e$	
X	Y	X	Y
1	Y1	0.67	Y2

Equivalent static radial load

$P_0 = X_0.Fr + Y_0.Fa$

X_0	Y_0
1	Y0

The values for e, Y1, Y2 and Y0 are shown in the above table .