# Technical data

## 22322.EAKW33C4


Double row spherical roller bearings



Spherical roller bearing, pressed steel cage, groove and lubrication holes on outer ring, tapered bore 1:12

ULTAGE

## Visual(s)

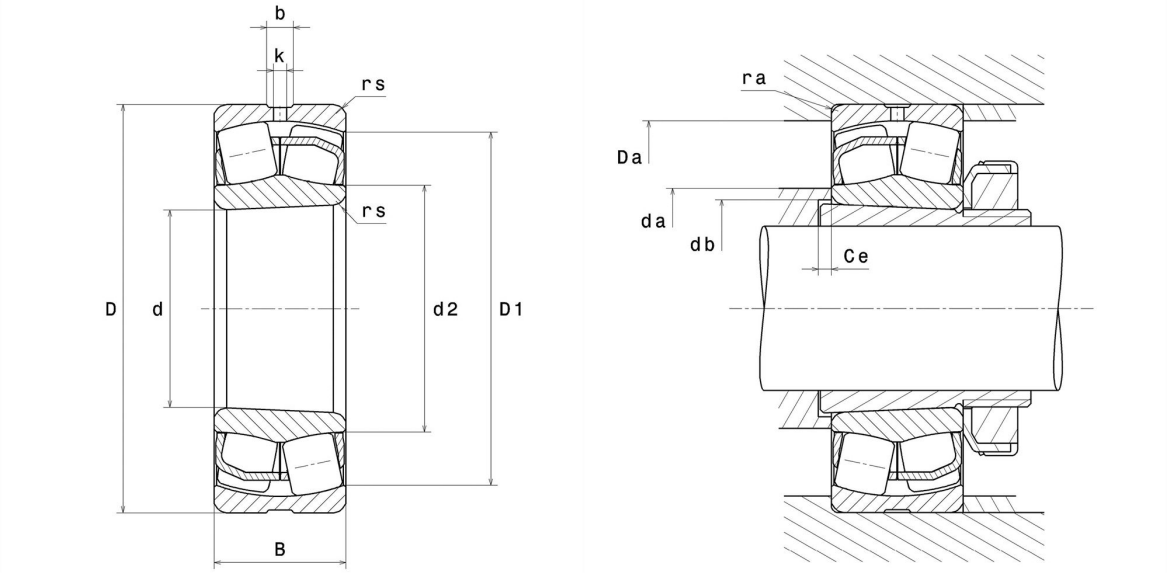


## Product definition

| | |
|---|---|
| **d** | 110 mm |
| **D** | 240 mm |
| **B** | 80 mm |
| **d2** | 138.9 mm |
| **D1** | 208.1 mm |
| **rs min** | 3 mm |
| **Number of lubrication holes** | 3 |
| **b** | 15.6 mm |
| **k** | 7 mm |
| **Associated sleeve reference** | H2322 |
| **e** | 0.32 |
| **Y1** | 2.09 |
| **Y2** | 3.11 |
| **Y0** | 2.04 |
| **Radial clearance class** | C4 |
| **Mass** | 16.51 kg |
| **Brand** | SNR |

## Product performance

| | |
|---|---|
| **Dynamic load, C** | 975 kN |
| **Static load, C0** | 972 kN |
| **Fatigue limit load, Cu** | 84.5 kN |
| **Nref** | 2,300 Tr/min |
| **Nlim** | 2,800 Tr/min |
| **Min operating temperature, Tmin** | -40 °C |
| **Max operating temperature, Tmax** | 200 °C |
| **Characteristic cage frequency, FTF** | 0.4 Hz |
| **Characteristic rolling element frequency, BSF** | 4.7 Hz |
| **Characteristic outer ring frequency, BPF0** | 5.6 Hz |
| **Characteristic inner ring frequency, BPFI** | 8.4 Hz |

## Abutment dimensions

| | |
|---|---|
| **da min** | 124 mm |
| **da max** | 2.5 mm |
| **db min** | 121 mm |
| **Ce min** | 7 mm |
| **Da max** | 226 mm |
| **ra max** | 2.5 mm |

## Calculation factors

### Equivalent dynamic radial load

$P = X.Fr + Y.Fa$

| $Fa/Fr \leq e$ | | $Fa/Fr > e$ | |
|---|---|---|---|
| X | Y | X | Y |
| 1 | Y1 | 0.67 | Y2 |

### Equivalent static radial load

$P_0 = X_0.Fr + Y_0.Fa$

| $X_0$ | $Y_0$ |
|---|---|
| 1 | Y0 |

The values for e, Y1, Y2 and Y0 are shown in the above table .