Technical data

23038EAKW33C4


Double row spherical roller bearings



Spherical roller bearing, pressed steel cage, groove and lubrication holes on outer ring, tapered bore 1:12

ULTAGE

Visual(s)

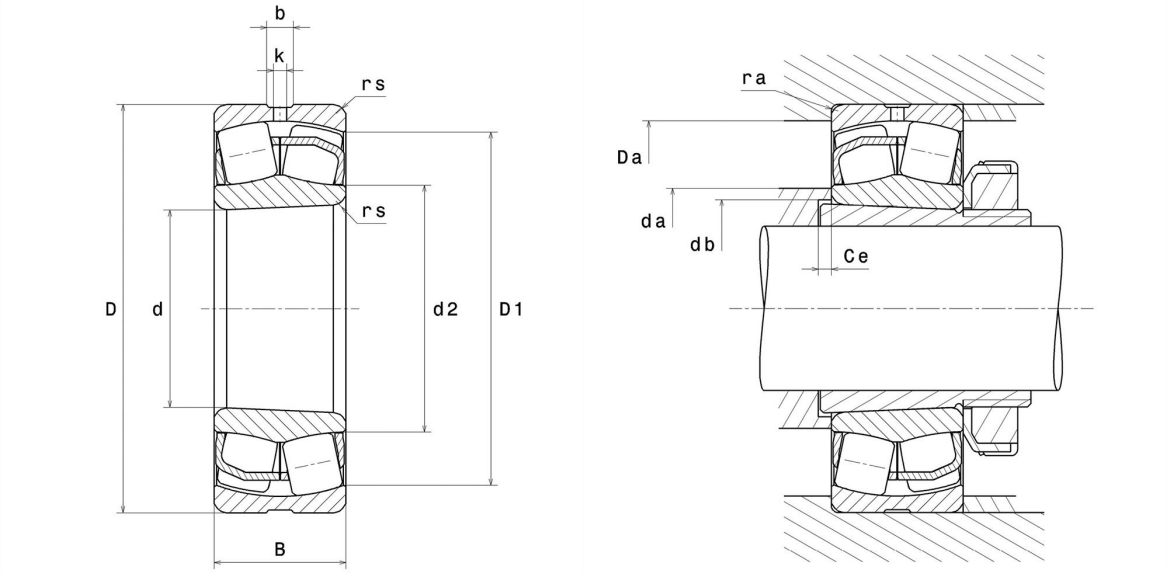

Product definition

d	190 mm
D	290 mm
B	75 mm
d2	213.4 mm
D1	265.1 mm
rs min	2.1 mm
Number of lubrication holes	3
b	13.2 mm
k	6 mm
Associated sleeve reference	H3038
e	0.22
Y1	3.01
Y2	4.48
Y0	2.94
Radial clearance class	C4
Mass	17.2 kg
Brand	SNR

Product performance

Dynamic load, C	1,140 kN
Static load, C0	1,570 kN
Fatigue limit load, Cu	120 kN
Nref	1,900 Tr/min
Nlim	2,400 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	200 °C
Characteristic cage frequency, FTF	0.44 Hz
Characteristic rolling element frequency, BSF	8.75 Hz
Characteristic outer ring frequency, BPF0	11.1 Hz
Characteristic inner ring frequency, BPFI	13.9 Hz

Abutment dimensions

da min	200.2 mm
da max	2 mm
db min	199 mm
Ce min	9 mm
Da max	279.8 mm
ra max	2 mm

Calculation factors

Equivalent dynamic radial load

$P = X.Fr + Y.Fa$

$Fa/Fr \leq e$		$Fa/Fr > e$	
X	Y	X	Y
1	Y1	0.67	Y2

Equivalent static radial load

$P_0 = X_0.Fr + Y_0.Fa$

X_0	Y_0
1	Y0

The values for e, Y1, Y2 and Y0 are shown in the above table .