Technical data

23128.EMW33C4


Double row spherical roller bearings




Spherical roller bearing, one-piece machined cage, groove and lubrication holes on outer ring

ULTAGE

Visual(s)

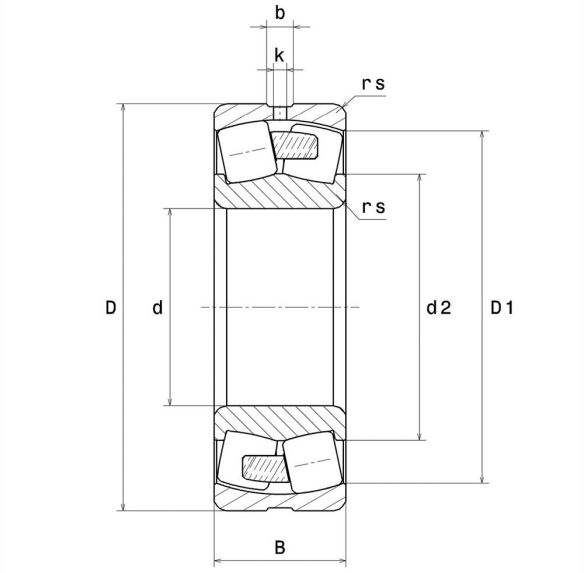

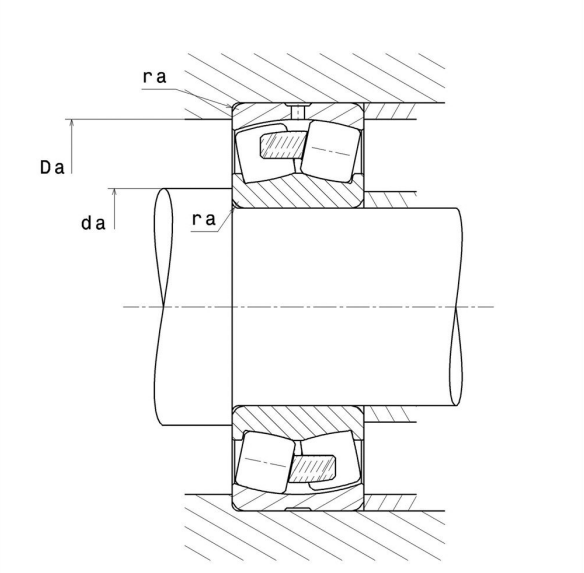

Product definition

d	140 mm
D	225 mm
B	68 mm
D1	202 mm
rs min	2.1 mm
Number of lubrication holes	3
b	10.5 mm
k	5 mm
Associated sleeve reference	P0
e	0.26
Y1	2.55
Y2	3.8
Y0	2.5
Radial clearance class	C4
Mass	11.3 kg
Brand	SNR

Product performance

Dynamic load, C	802 kN
Static load, C0	1,030 kN
Fatigue limit load, Cu	76.6 kN
Nref	2,200 Tr/min
Nlim	2,800 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	200 °C
Characteristic cage frequency, FTF	0.44 Hz
Characteristic rolling element frequency, BSF	7.84 Hz
Characteristic outer ring frequency, BPF0	9.64 Hz
Characteristic inner ring frequency, BPFI	12.36 Hz

Abutment dimensions

da min	152 mm
da max	2 mm
Da max	213 mm
ra max	2 mm

Calculation factors

Equivalent dynamic radial load

$P = X.Fr + Y.Fa$

$Fa/Fr \leq e$		$Fa/Fr > e$	
X	Y	X	Y
1	Y1	0.67	Y2

Equivalent static radial load

$P_0 = X_0.Fr + Y_0.Fa$

X_0	Y_0
1	Y0

The values for e, Y1, Y2 and Y0 are shown in the above table .