Technical data

23236EF800


Double row spherical roller bearings



Spherical roller bearing for vibratory applications, one-piece machined cage, groove and lubrication holes on outer ring, special C4 class clearance

ULTAGE

Visual(s)

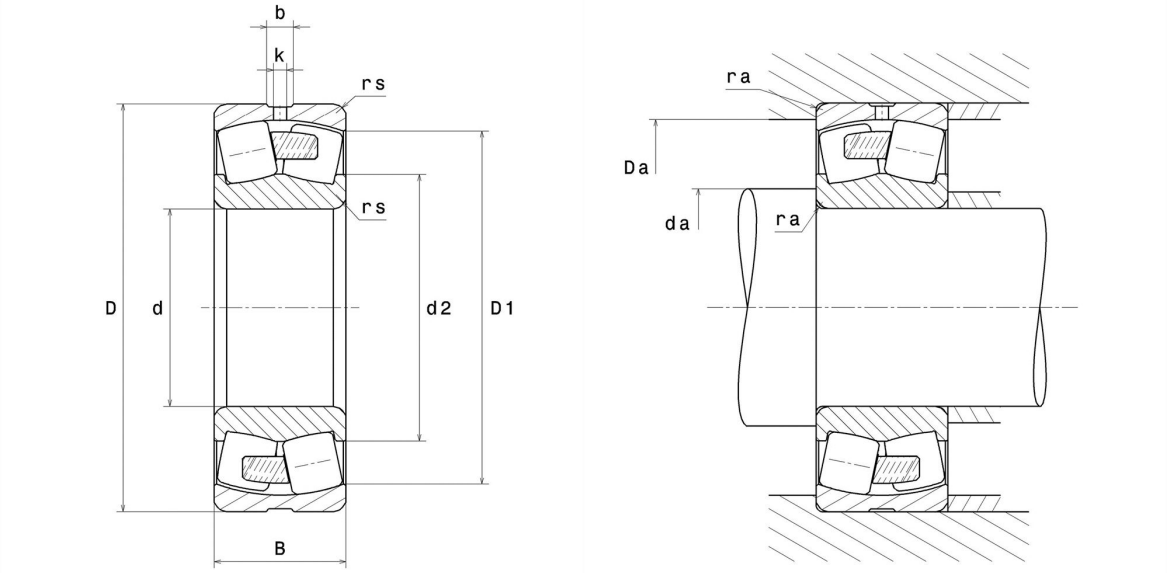

Product definition

d	180 mm
D	320 mm
B	112 mm
d2	220 mm
D1	281.2 mm
rs min	4 mm
Number of lubrication holes	3
b	16.4 mm
k	8 mm
Associated sleeve reference	P0spé
e	0.33
Y1	2.06
Y2	3.06
Y0	2.01
Radial clearance class	C4 Special
Mass	37.8 kg
Brand	SNR

Product performance

Dynamic load, C	1,800 kN
Static load, C0	2,270 kN
Fatigue limit load, Cu	142 kN
Nref	1,200 Tr/min
Nlim	1,900 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	200 °C
Characteristic cage frequency, FTF	0.43 Hz
Characteristic rolling element frequency, BSF	6.43 Hz
Characteristic outer ring frequency, BPF0	8.09 Hz
Characteristic inner ring frequency, BPFI	10.91 Hz

Abutment dimensions

da min	197 mm
da max	3 mm
Da max	303 mm
ra max	3 mm

Calculation factors

Equivalent dynamic radial load

$P = X.Fr + Y.Fa$

Fa / Fr ≤ e		Fa / Fr > e	
X	Y	X	Y
1	Y1	0.67	Y2

Equivalent static radial load

$P_0 = X_0.Fr + Y_0.Fa$

X_0	Y_0
1	Y0

The values for e, Y1, Y2 and Y0 are shown in the above table .