Technical data

24032.EAK30W33C3


Double row spherical roller bearings




Spherical roller bearing, pressed steel cage, groove and lubrication holes on outer ring, tapered bore 1:30, non ISO width, contact seals on both sides

ULTAGE

Visual(s)

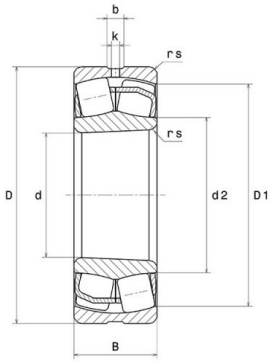



Product definition

d	160 mm
D	240 mm
B	80 mm
d2	173.8 mm
D1	216.2 mm
rs min	2.1 mm
Number of lubrication holes	3
b	9.5 mm
k	4.5 mm
Associated sleeve reference	P0
e	0.29
Y1	2.32
Y2	3.45
Y0	2.26
Radial clearance class	C3
Mass	11.48 kg
Brand	SNR

Product performance

Dynamic load, C	953 kN
Static load, C0	1,320 kN
Fatigue limit load, Cu	87.3 kN
Nref	1,800 Tr/min
Nlim	2,600 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	200 °C
Characteristic cage frequency, FTF	0.44 Hz
Characteristic rolling element frequency, BSF	8.46 Hz
Characteristic outer ring frequency, BPF0	10.62 Hz
Characteristic inner ring frequency, BPFI	13.38 Hz

Abutment dimensions

da min	170.2 mm
da max	2 mm
Da max	229.8 mm
ra max	2 mm

Calculation factors

Equivalent dynamic radial load

$P = X.Fr + Y.Fa$

$Fa/Fr \leq e$		$Fa/Fr > e$	
X	Y	X	Y
1	Y1	0.67	Y2

Equivalent static radial load

$P_0 = X_0.Fr + Y_0.Fa$

X_0	Y_0
1	Y0

The values for e, Y1, Y2 and Y0 are shown in the above table .