Technical data

30306.A


Single row tapered roller bearings

Tapered roller bearing, pressed steel cage

ULTAGE



Visual(s)

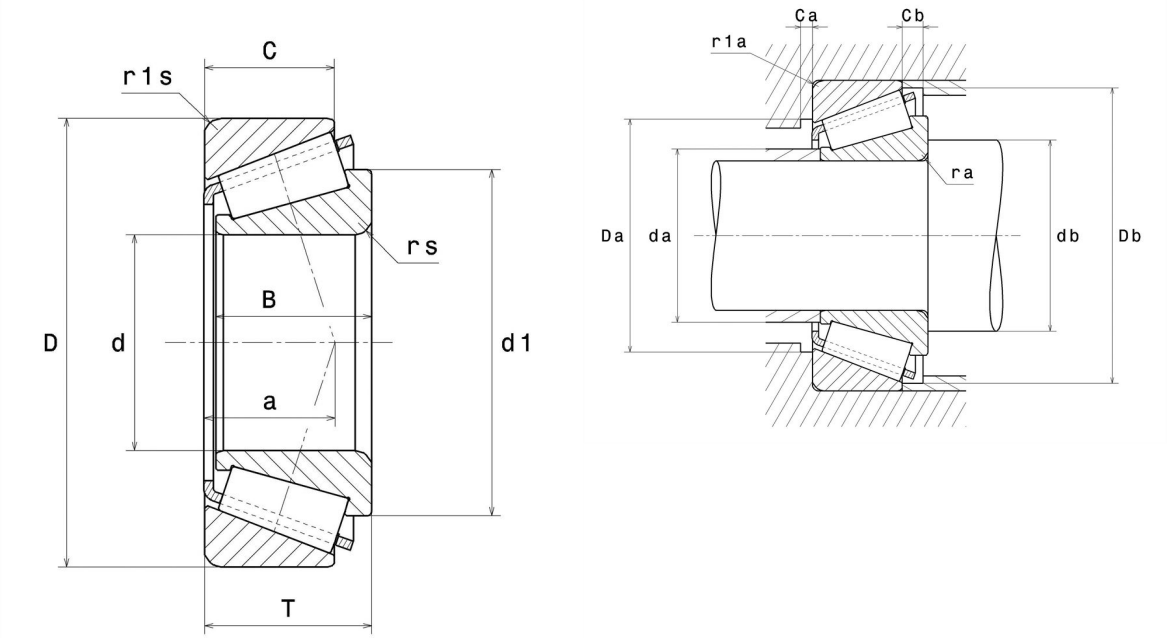

Product definition

d	30 mm
D	72 mm
B	19 mm
C	16 mm
T	20.75 mm
d1	49.2 mm
a	15.4 mm
rs min	1.5 mm
r1s min	1.5 mm
e	0.32
Y2	1.9
Y0	1.05
Mass	0.39 kg
ISO 355 reference	T2FB030
Brand	SNR

Product performance

Dynamic load, C	12.52 kN
Rating life coefficient, A2	1
Static load, C0	63.4 kN
Fatigue limit load, Cu	7.7 kN
Nref	7,200 Tr/min
Nlim	11,000 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.4 Hz
Characteristic rolling element frequency, BSF	4.69 Hz
Characteristic outer ring frequency, BPF0	5.6 Hz
Characteristic inner ring frequency, BPFI	8.4 Hz

Abutment dimensions

da max	40 mm
db min	38.5 mm
Da min	62 mm
Da max	63.5 mm
Db min	66 mm
Ca min	3 mm
Cb min	4.5 mm
ra max	1.5 mm
r1a max	1.5 mm

Calculation factors

Equivalent dynamic radial load

$P = X.Fr + Y.Fa$

$Fa / Fr \leq e$		$Fa / Fr > e$	
X	Y	X	Y
1	0	0.4	Y2

Equivalent static radial load

$Po = Xo.Fr + Yo.Fa$

X_0	Y_0
0.5	Y0

If $Po < Fr$, then use $Po = Fr$

The values for e, Y2 and Y0 are shown in the above table