
Technical datasheet


4203A


Double row deep groove ball bearings



Double row deep groove ball bearing, polyamide cage, open

Visual(s)

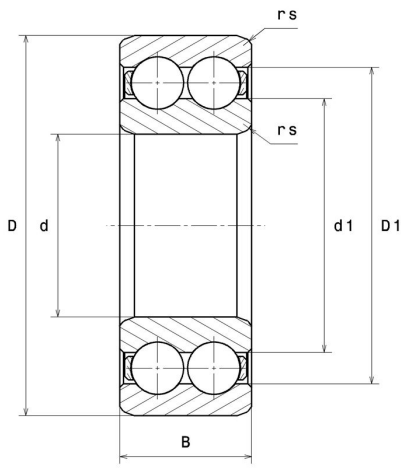

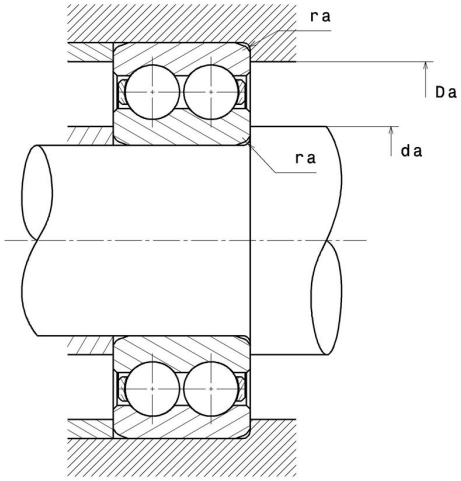

Product definition

d	17 mm
D	40 mm
B	16 mm
d1	24 mm
D1	33 mm
rs min	0.6 mm
Radial clearance class	CN
Precision class	P0
Mass	0.09 kg
Brand	SNR

Product performance

Dynamic load, C	14.7 kN
Static load, C0	9.5 kN
Fatigue limit load, Cu	0.59 kN
f0	13.1
Nref	15,000 rpm
Nlim	17,000 rpm
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.38 Hz
Characteristic rolling element frequency, BSF	3.99 Hz
Characteristic outer ring frequency, BPF0	3.05 Hz
Characteristic inner ring frequency, BPFI	4.95 Hz

Abutment dimensions

da min	21 mm
Da max	36 mm
ra max	0.6 mm