
Technical datasheet


5208EEG15


Double row angular contact ball bearings



Double row angular contact ball bearing, polyamide cage, contact seals on both sides

Visual(s)

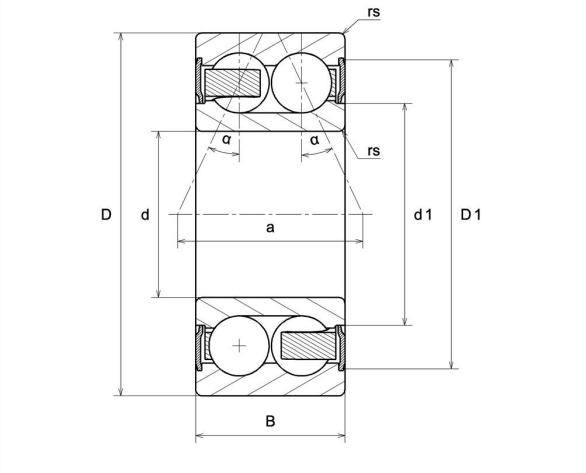

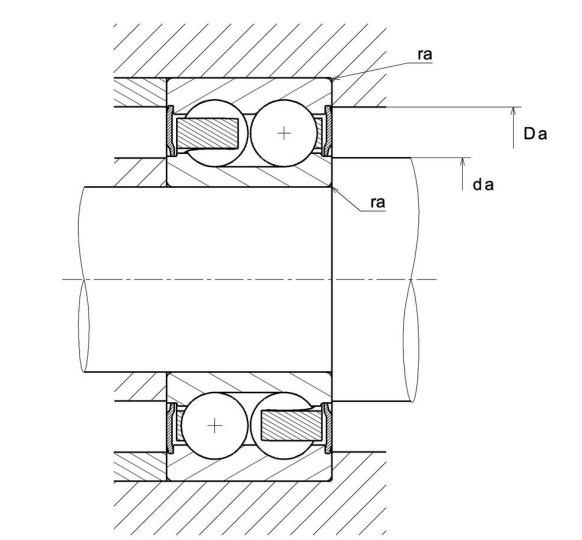

Product definition

d	40 mm
D	80 mm
B	30.2 mm
d1	48 mm
D1	71 mm
a	40.6 mm
Contact angle α	25 °
rs min	1.1 mm
Radial clearance class	CN
Precision class	P0
Mass	0.56 kg
Brand	SNR

Product performance

Dynamic load, C	46.2 kN
Static load, C0	37.1 kN
Fatigue limit load, Cu	2.29 kN
f0	14.4
Nlim	5,800 rpm
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.41 Hz
Characteristic rolling element frequency, BSF	4.88 Hz
Characteristic outer ring frequency, BPF0	4.1 Hz
Characteristic inner ring frequency, BPFI	5.9 Hz

Abutment dimensions

da min	46.5 mm
da max	48 mm
Da max	73.5 mm
ra max	1 mm