

Technical datasheet


5210EEG15C3

Double row angular contact ball bearings



Visual(s)

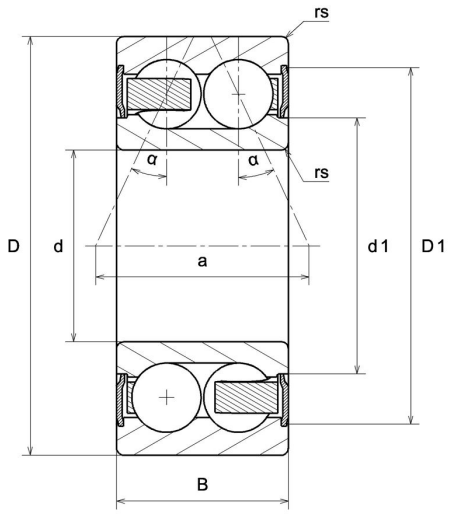

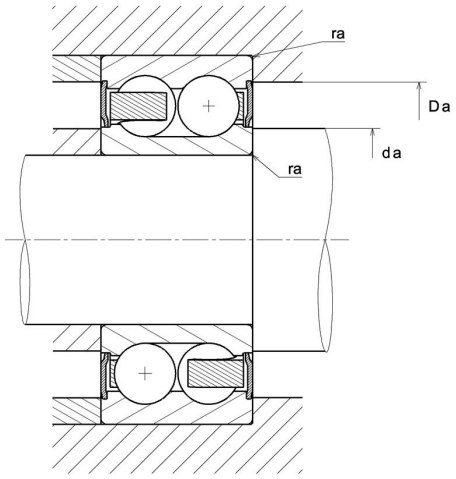

Product definition

d	50 mm
D	90 mm
B	30.2 mm
d1	62 mm
D1	80.6 mm
a	45.5 mm
Contact angle α	25 °
rs min	1.1 mm
Radial clearance class	C3
Precision class	P0
Mass	0.76 kg
Brand	SNR

Product performance

Dynamic load, C	48.5 kN
Static load, C0	42.2 kN
Fatigue limit load, Cu	2.55 kN
f0	14.9
Nlim	4,600 rpm
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.42 Hz
Characteristic rolling element frequency, BSF	5.45 Hz
Characteristic outer ring frequency, BPF0	4.19 Hz
Characteristic inner ring frequency, BPFI	5.81 Hz

Abutment dimensions

da min	56.5 mm
da max	62 mm
Da max	83.5 mm
ra max	1 mm