

Technical datasheet


5211ZZG15

Double row angular contact ball bearings



Visual(s)

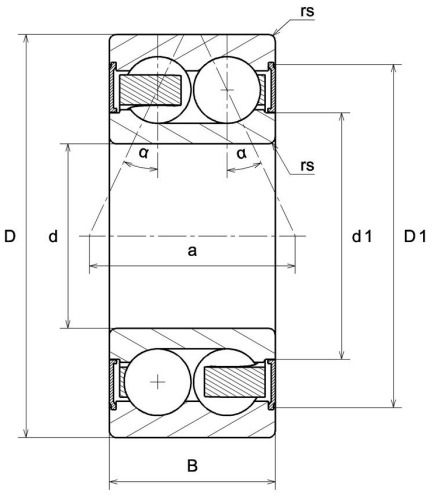

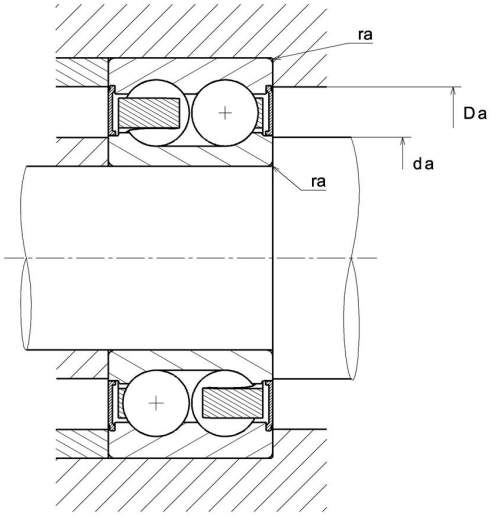

Product definition

d	55 mm
D	100 mm
B	33.3 mm
d1	68.7 mm
D1	88.9 mm
a	49.9 mm
Contact angle α	25 °
rs min	1.5 mm
Radial clearance class	CN
Precision class	P0
Mass	0.88 kg
Brand	SNR

Product performance

Dynamic load, C	55.5 kN
Static load, C0	49.4 kN
Fatigue limit load, Cu	2.95 kN
f0	15
Nref	5,500 rpm
Nlim	5,100 rpm
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.42 Hz
Characteristic rolling element frequency, BSF	5.56 Hz
Characteristic outer ring frequency, BPF0	4.21 Hz
Characteristic inner ring frequency, BPFI	5.79 Hz

Abutment dimensions

da min	63 mm
da max	68.7 mm
Da max	92 mm
ra max	1.5 mm