
Technical datasheet


5212EEG15


Double row angular contact ball bearings



Double row angular contact ball bearing, polyamide cage, contact seals on both sides

Visual(s)

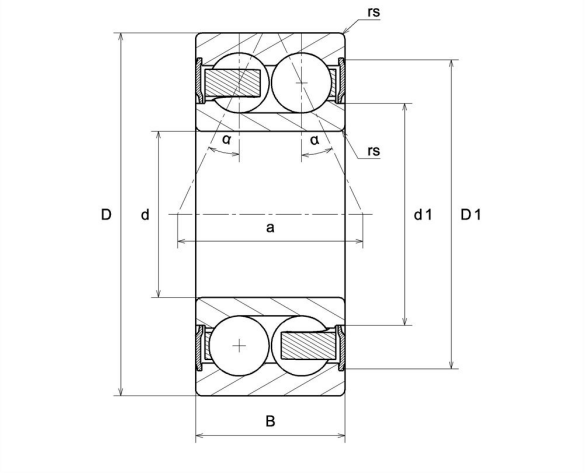

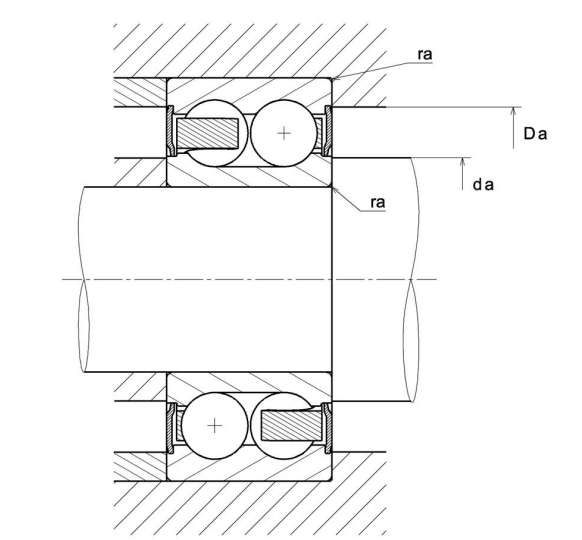

Product definition

d	60 mm
D	110 mm
B	36.5 mm
d1	70 mm
D1	97.9 mm
a	55.2 mm
Contact angle α	25 °
rs min	1.5 mm
Radial clearance class	CN
Precision class	P0
Mass	1.25 kg
Brand	SNR

Product performance

Dynamic load, C	67.2 kN
Static load, C0	61.5 kN
Fatigue limit load, Cu	3.65 kN
f0	15.1
Nlim	4,000 rpm
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.42 Hz
Characteristic rolling element frequency, BSF	5.81 Hz
Characteristic outer ring frequency, BPF0	4.66 Hz
Characteristic inner ring frequency, BPFI	6.39 Hz

Abutment dimensions

da min	68 mm
da max	70 mm
Da max	102 mm
ra max	1.5 mm