Technical data

6021.C3


Single row deep groove ball bearings



Deep groove ball bearing, radial contact, pressed steel cage, open

ULTAGE

Visual(s)

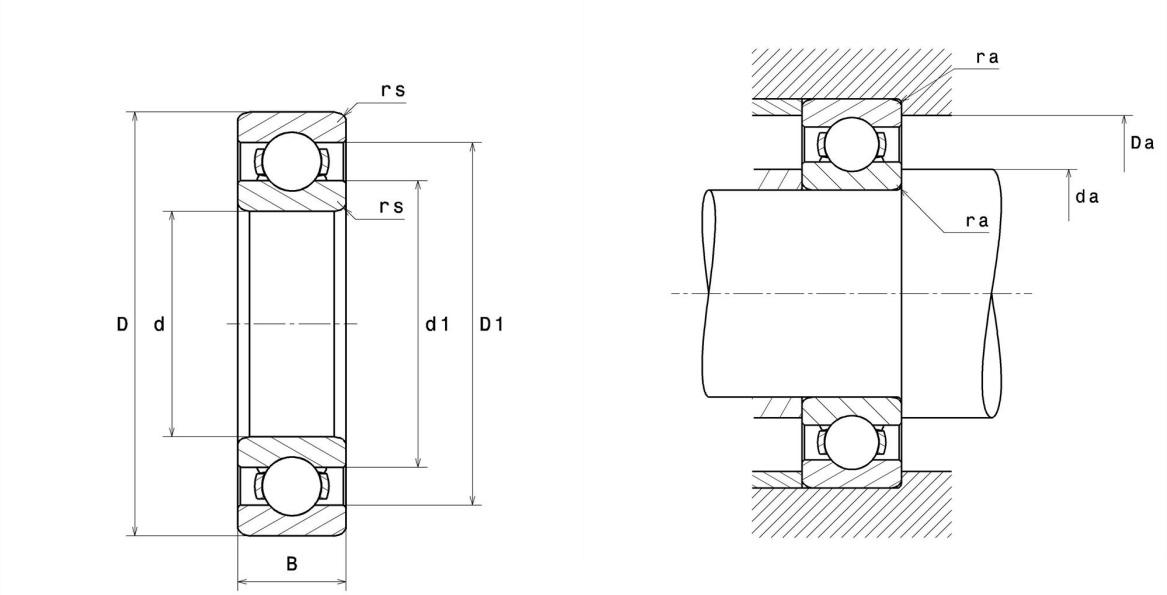

Product definition

d	105 mm
D	160 mm
B	26 mm
d1	118.9 mm
D1	149.2 mm
a min	1 mm
rs min	2 mm
rNs min	2 mm
Snap ring reference	0
Radial clearance class	C3
Mass	1.59 kg
Brand	SNR

Product performance

Dynamic load, C	2.6 kN
Static load, C0	65.9 kN
Fatigue limit load, Cu	2.6 kN
f0	15.8
Nref	5,000 Tr/min
Nlim	6,600 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.44 Hz
Characteristic rolling element frequency, BSF	7.94 Hz
Characteristic outer ring frequency, BPF0	6.57 Hz
Characteristic inner ring frequency, BPFI	8.43 Hz

Abutment dimensions

da min	114 mm
db min	6,600 mm
Ce min	0 mm
Da max	151 mm
ra max	2 mm
Db min	114 mm

Calculation factors

Equivalent dynamic radial load

P = X.Fr + Y.Fa

$\frac{f_0 F_a}{C_0}$	e	Fa / Fr ≤ e		Fa / Fr > e	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

Po = Xo.Fr + Yo.Fa

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement :

If Po <Fr, then use Po = Fr