# Technical data


## CEX207

Insert bearings



cylindrical outer diameter, fixing by eccentric locking collar, seal with slinger

## Visual(s)

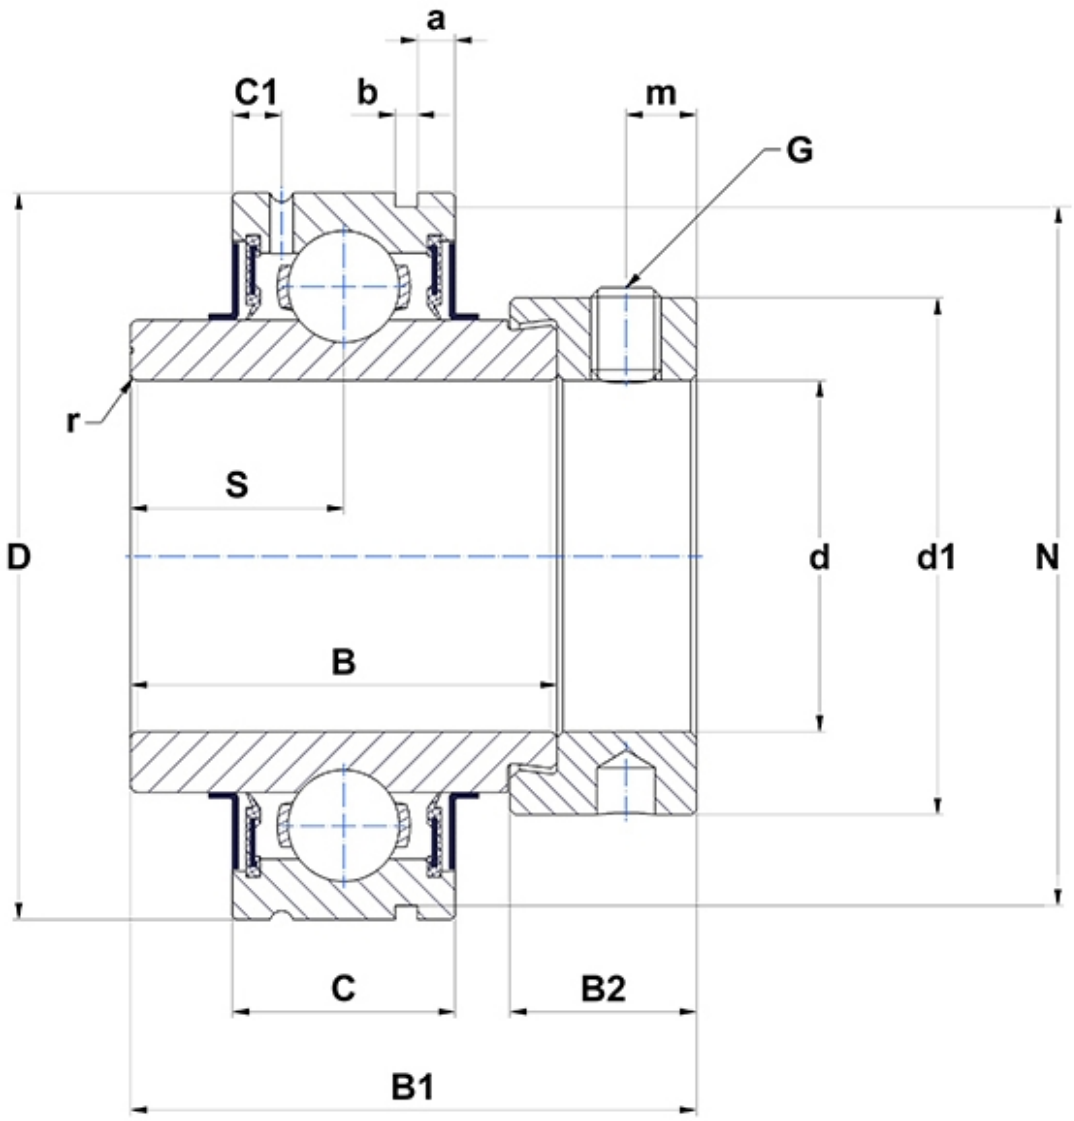

## Product definition

| | |
|---|---|
| **a** | 3.3 mm |
| **b** | 1.9 mm |
| **B** | 37.6 mm |
| **B1** | 51.1 mm |
| **B2** | 17.5 mm |
| **C** | 20 mm |
| **C1** | 5 mm |
| **d** | 35 mm |
| **d1** | 55.5 mm |
| **D** | 72 mm |
| **G** | M8x1 |
| **m** | 6.5 mm |
| **N1** | 68.81 mm |
| **r** | 1.5 |
| **S** | 18.8 mm |
| **SW** | 4 mm |

## Product performance

| | |
|---|---|
| **C** | 25.7 kN |
| **C0** | 15.2 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 0.6 kg |
| **Recommended tightening torque for set screw** | 11.5 Nm |