
# Technical data


## ESFA.206

Bearing units



grey cast housing, radial insert ball bearing with eccentric locking collar, single lip seal

## Visual(s)

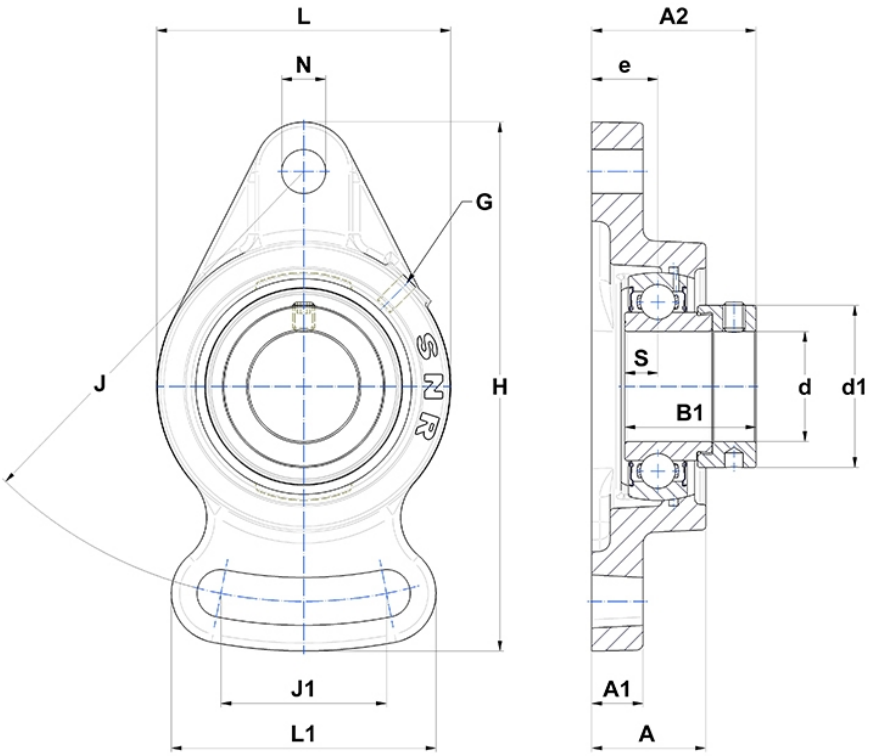

## Product definition

| | |
|---|---|
| **B** | 23.8 mm |
| **A** | 31 mm |
| **A1** | 14 mm |
| **A2** | 44.7 mm |
| **B1** | 35.7 mm |
| **d** | 30 mm |
| **d1** | 44.1 mm |
| **e** | 18 mm |
| **G** | M6x1 |
| **H** | 144 mm |
| **H** | 144 mm |
| **J** | 117 mm |
| **J1** | 58 mm |
| **L** | 80 mm |
| **L1** | 72 mm |
| **N** | 12mm |
| **s1** | 27.8 mm |
| **S** | 9 mm |

## Product performance

| | |
|---|---|
| **C** | 19.5 kN |
| **C0** | 11.2 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 0.93 kg |
| **Recommended tightening torque for set screw** | 11.5 Nm |
| **Designation of housing** | FA206- |
| **Designation of bearing** | ES206G2 |