


## Technical data

# ESFL205COE

Bearing units

grey cast housing, radial insert ball bearing with eccentric locking collar, single lip seal

## Visual(s)

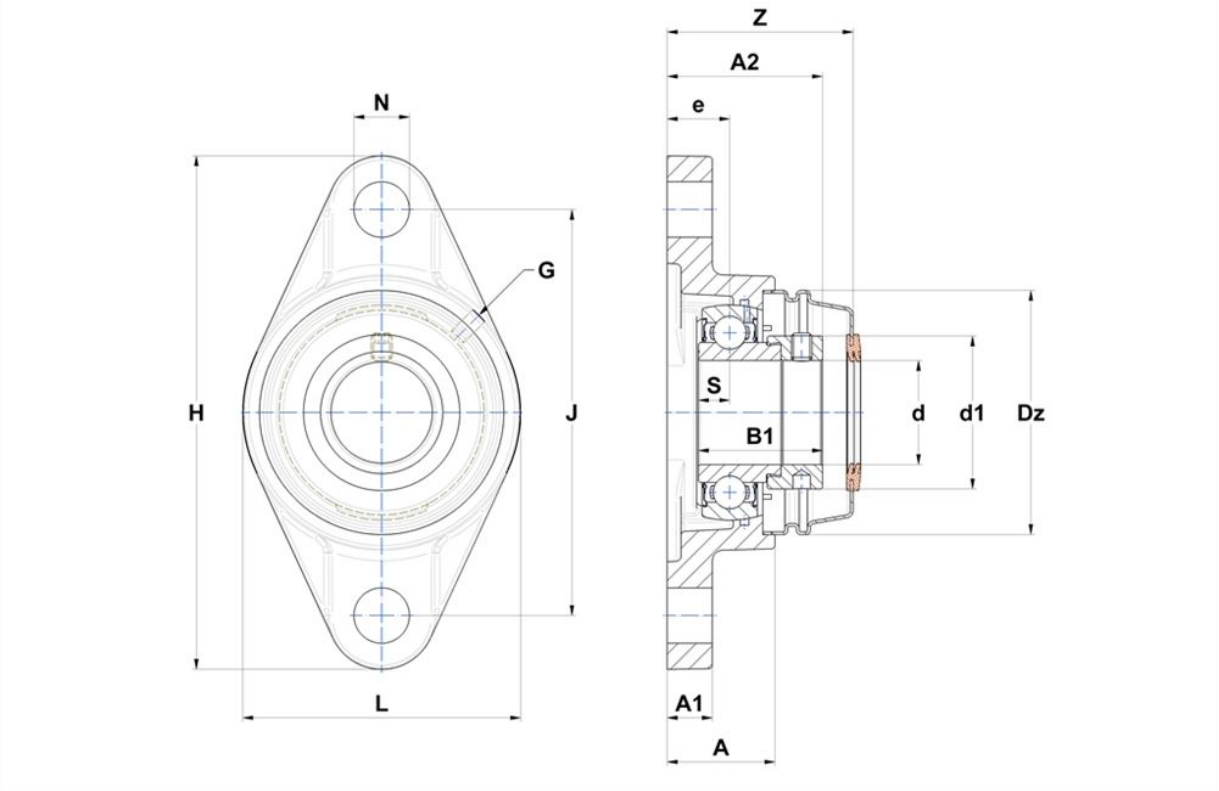

## Product definition

| | |
|---|---|
| **B** | 21.4 mm |
| **A** | 27 mm |
| **A1** | 13 mm |
| **A2** | 39.4 mm |
| **B1** | 30.9 mm |
| **d** | 25 mm |
| **d1** | 37.4 mm |
| **Dz** | 60 mm |
| **e** | 16 mm |
| **G** | M6x1 |
| **H** | 130 mm |
| **H** | 130 mm |
| **J** | 99 mm |
| **L** | 68 mm |
| **N** | 16mm |
| **s1** | 24.2 mm |
| **S** | 7.5 mm |
| **Z** | 48.2 mm |

## Product performance

| | |
|---|---|
| **C** | 14 kN |
| **C0** | 7.88 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 0.63 kg |
| **Recommended tightening torque for set screw** | 5.5 Nm |
| **Designation of housing** | FL205N- |
| **Designation of bearing** | ES205G2 |
| **Designation of open end cover** | SCOE205-25 |