
# Technical data


## ESPAE210CCE

Bearing units



grey cast housing, radial insert ball bearing with eccentric locking collar, single lip seal

## Visual(s)

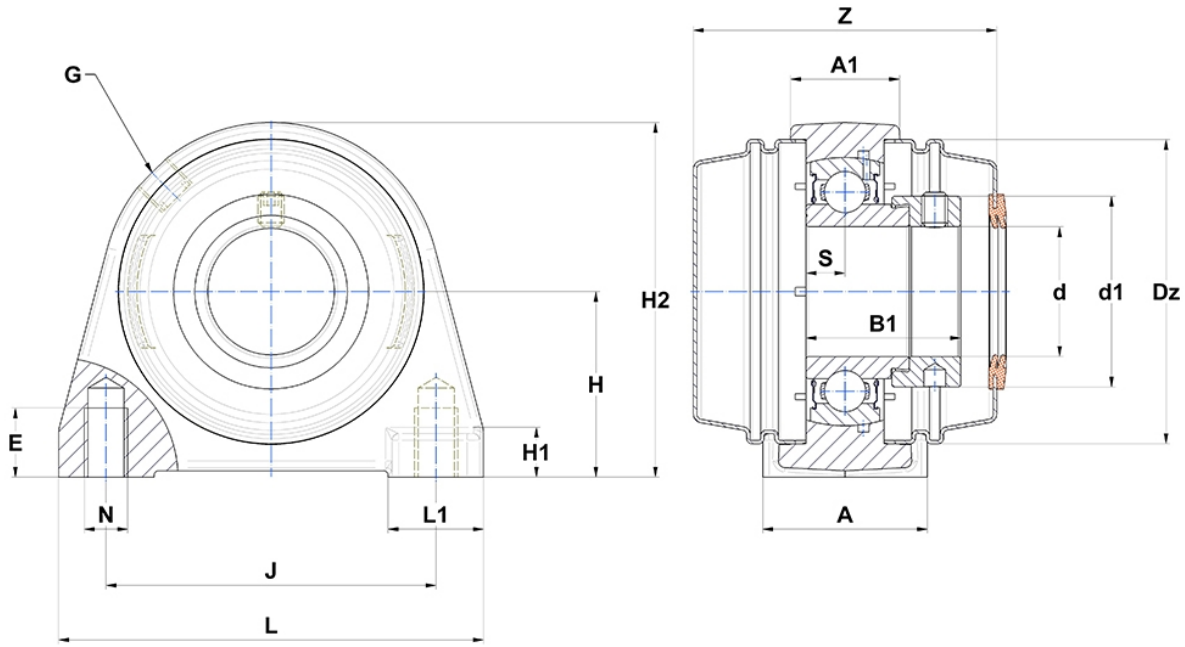

## Product definition

| | |
|---|---|
| **A** | 54 mm |
| **A1** | 34 mm |
| **B** | 30.2 mm |
| **B1** | 43.7 mm |
| **d** | 50 mm |
| **d1** | 67.2 mm |
| **Dz** | 100 mm |
| **E** | 20 mm |
| **G** | R1/8" |
| **H** | 57.2 mm |
| **H1** | 15 mm |
| **H2** | 115 mm |
| **J** | 101.6 mm |
| **L** | 135 mm |
| **L1** | 33.5 mm |
| **N** | M16 |
| **s1** | 33.4 mm |
| **S** | 11 mm |
| **Z** | 91.5 mm |

## Product performance

| | |
|---|---|
| **C** | 35.1 kN |
| **C0** | 23.2 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 2.65 kg |
| **Recommended tightening torque for set screw** | 11.5 Nm |
| **Designation of housing** | PAE210N- |
| **Designation of bearing** | ES210G2 |
| **Designation of closed end cover** | SCCE210 |
| **Designation of open end cover** | SCOE210-50 |