
# Technical data


## ESPE208N

Bearing units



grey cast housing, radial insert ball bearing with eccentric locking collar, single lip seal

## Visual(s)

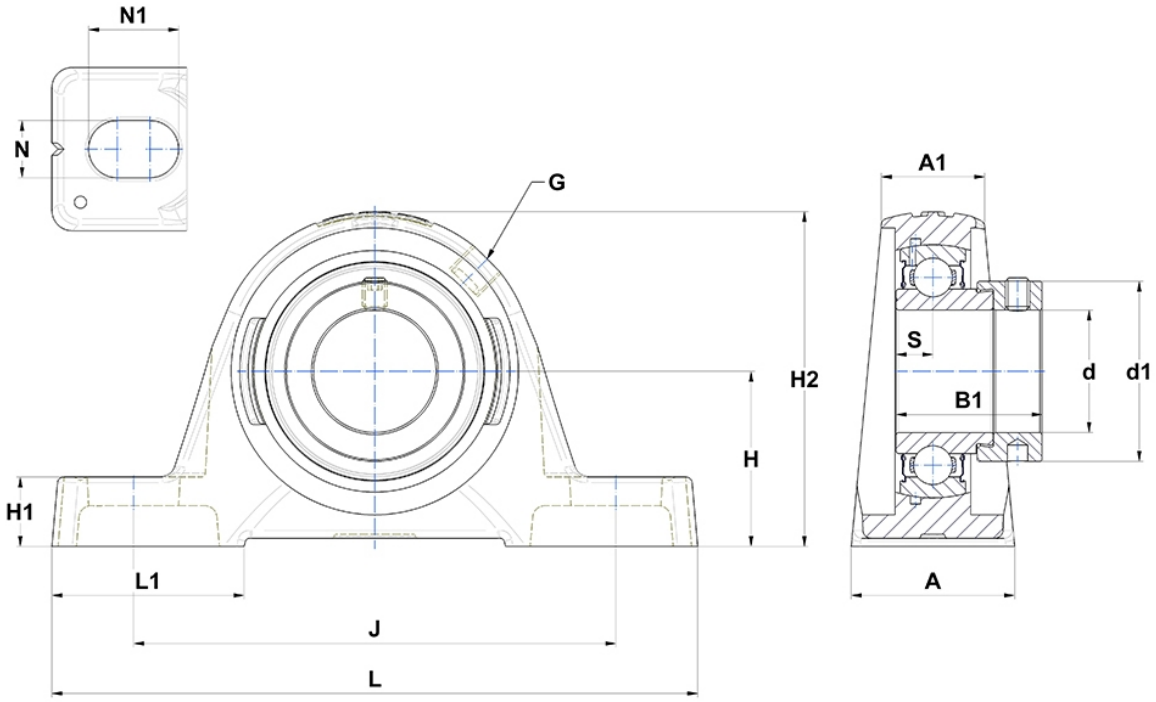

## Product definition

| | |
|---|---|
| **A** | 48 mm |
| **A1** | 30 mm |
| **B** | 30.2 mm |
| **B1** | 43.7 mm |
| **d** | 40 mm |
| **d1** | 58 mm |
| **G** | R1/8" |
| **H** | 49.2 mm |
| **H1** | 19 mm |
| **H2** | 99 mm |
| **J** | 138 mm |
| **L** | 179 mm |
| **L1** | 53 mm |
| **N** | 14mm |
| **N1** | 26 mm |
| **s1** | 33.4 mm |
| **S** | 11 mm |
| **Z** | 23.5 mm |

## Product performance

| | |
|---|---|
| **C** | 29.6 kN |
| **C0** | 18.2 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 1.85 kg |
| **Recommended tightening torque for set screw** | 11.5 Nm |
| **Designation of housing** | PE208N- |
| **Designation of bearing** | ES208G2 |