# Technical data


## ESPLE.205

Bearing units



grey cast housing, radial insert ball bearing with eccentric locking collar, single lip seal

## Visual(s)

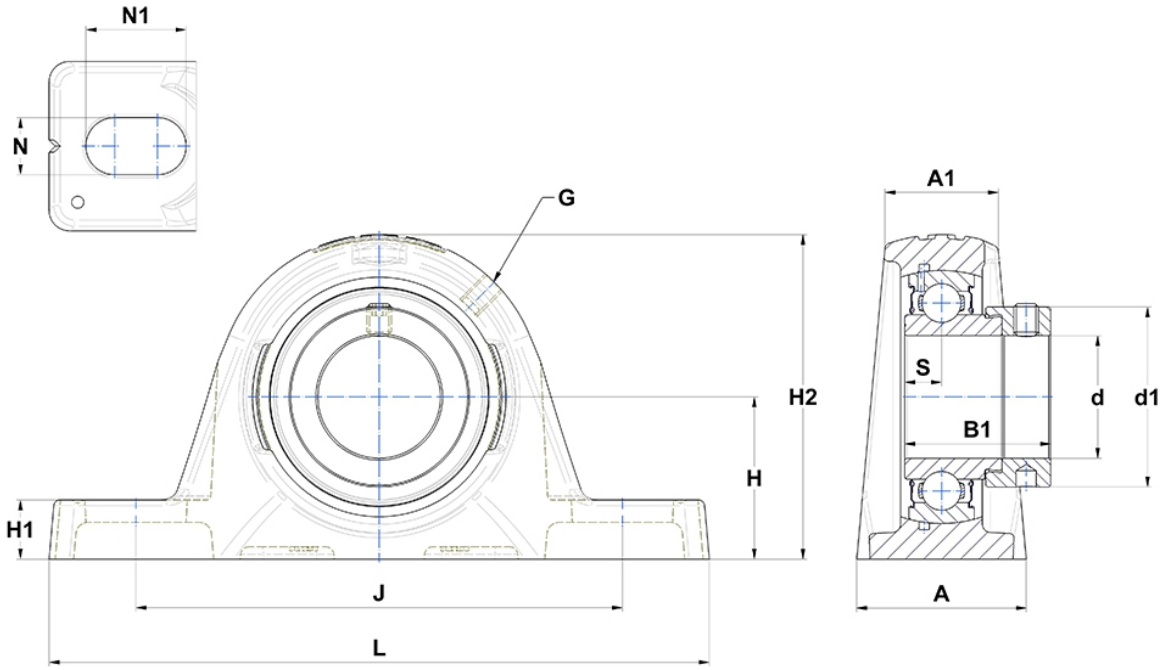

## Product definition

| | |
|---|---|
| **A** | 36.5 mm |
| **A1** | 24.5 mm |
| **B** | 21.4 mm |
| **B1** | 30.9 mm |
| **d** | 25 mm |
| **d1** | 37.4 mm |
| **G** | M6x1 |
| **H** | 33.3 mm |
| **H1** | 12.8 mm |
| **H2** | 67.8 mm |
| **J** | 104.2 mm |
| **L** | 139 mm |
| **N** | 11mm |
| **N1** | 17 mm |
| **s1** | 24.2 mm |
| **S** | 7.5 mm |

## Product performance

| | |
|---|---|
| **C** | 14 kN |
| **C0** | 7.88 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 0.79 kg |
| **Recommended tightening torque for set screw** | 5.5 Nm |
| **Designation of housing** | PLE205- |
| **Designation of bearing** | ES205G2 |