# Technical data


## EX209AGR

Insert bearings



zinc-coated insert, spherical outer diameter, fixing by eccentric locking collar, AGR-sealing, for life lubrication

## Visual(s)

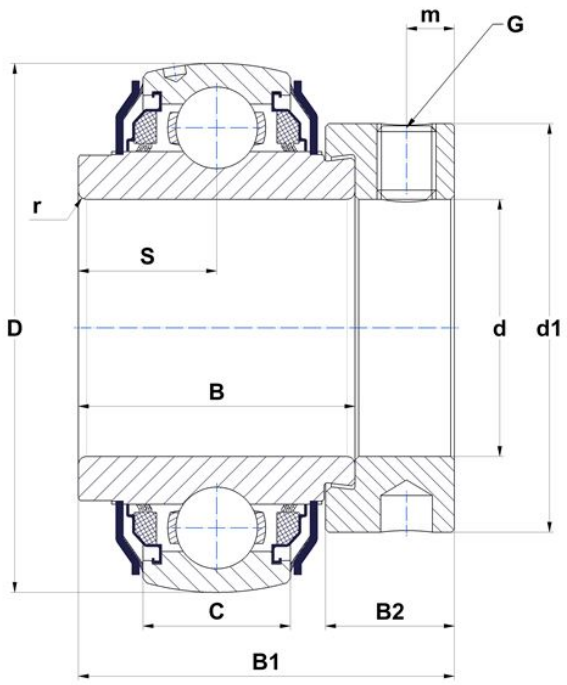


## Product definition

| | |
|---|---|
| **B** | 42.8 mm |
| **B1** | 56.3 mm |
| **B2** | 18.3 mm |
| **C** | 22 mm |
| **d** | 45 mm |
| **d1** | 63.5 mm |
| **D** | 85 mm |
| **G** | M8x1 |
| **m** | 6.5 mm |
| **r** | 1.1 |
| **S** | 21.4 mm |
| **SW** | 4 mm |

## Product performance

| | |
|---|---|
| **C** | 31.85 kN |
| **C0** | 20.8 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 0.87 kg |
| **Recommended tightening torque for set screw** | 11.5 Nm |