Technical data


EX210AGR

Insert bearings



zinc-coated insert, spherical outer diameter, fixing by eccentric locking collar, AGR-sealing, for life lubrication

Visual(s)

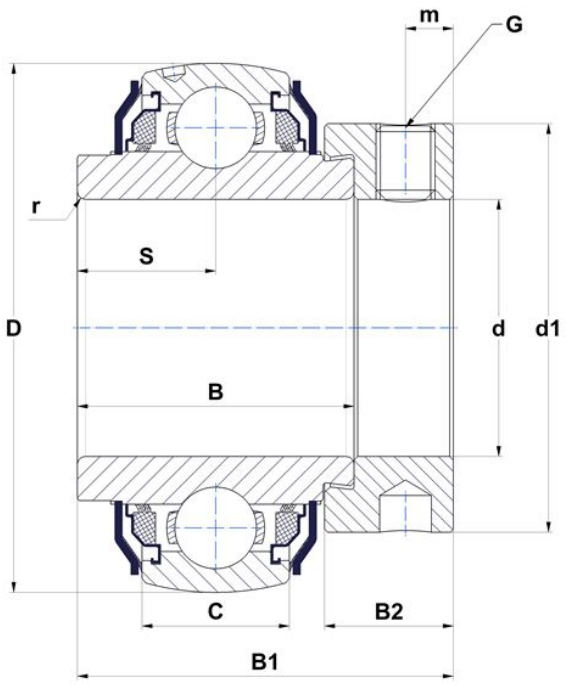

Product definition

B	49.2 mm
B1	62.7 mm
B2	18.3 mm
C	23 mm
d	50 mm
d1	67.2 mm
D	90 mm
G	M8x1
m	6.5 mm
r	1.1
S	24.6 mm
SW	4 mm

Product performance

C	35.1 kN
C0	23.2 kN
T min.	-20 °C
T max.	100 °C

Other features

Weight	1.01 kg
Recommended tightening torque for set screw	11.5 Nm