
## Technical data

# EX308G2L3

Insert bearings

spherical outer diameter, fixing by eccentric locking collar, triple lip seal

## Visual(s)

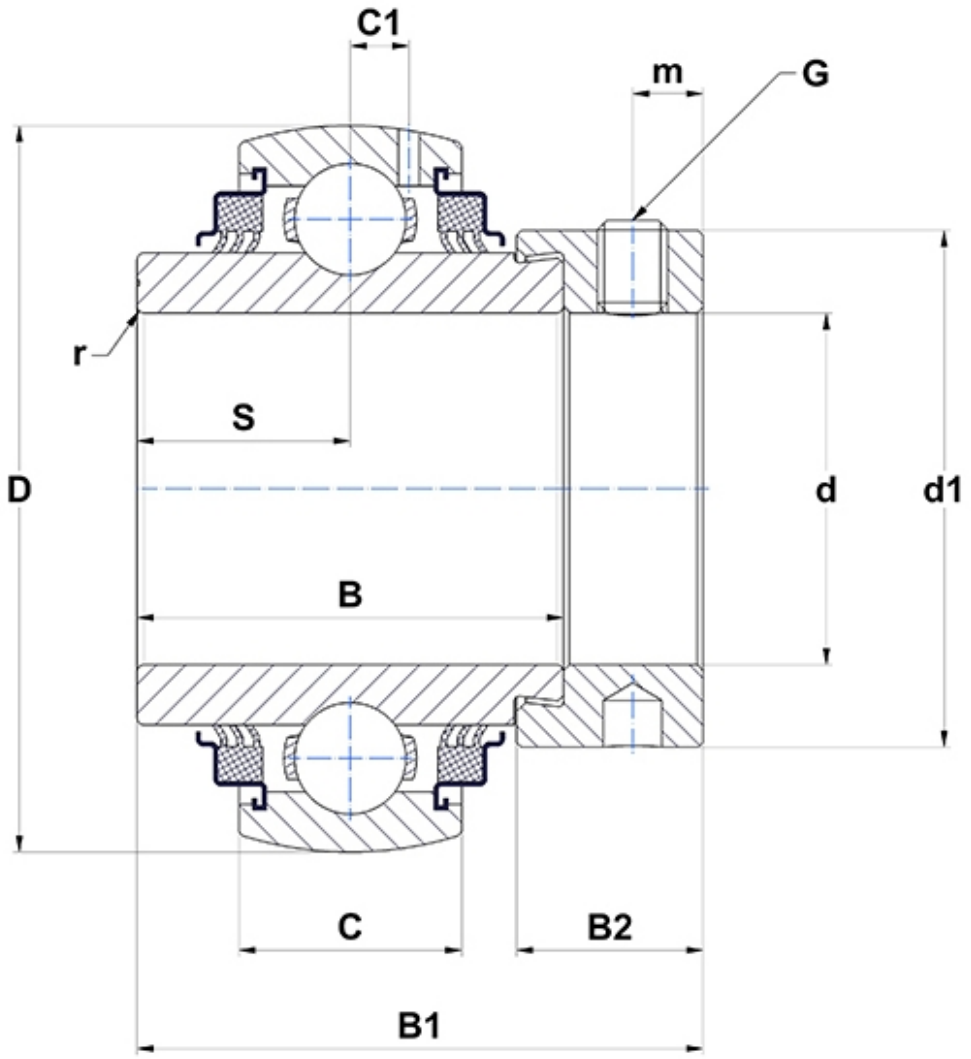

## Product definition

| | |
|---|---|
| **B** | 41.3 mm |
| **B1** | 57.1 mm |
| **B2** | 20.6 mm |
| **C** | 28 mm |
| **C1** | 8.5 mm |
| **d** | 40 mm |
| **d1** | 63.5 mm |
| **D** | 90 mm |
| **G** | M10x1,25 |
| **m** | 8 mm |
| **r** | 2 |
| **S** | 19.8 mm |
| **SW** | 5 mm |

## Product performance

| | |
|---|---|
| **C** | 40.56 kN |
| **C0** | 24 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 1.08 kg |
| **Recommended tightening torque for set screw** | 22 Nm |