# Technical data


## EXEHE203

Bearing units



grey cast housing, radial insert ball bearing with eccentric locking collar, seal with slinger

## Visual(s)

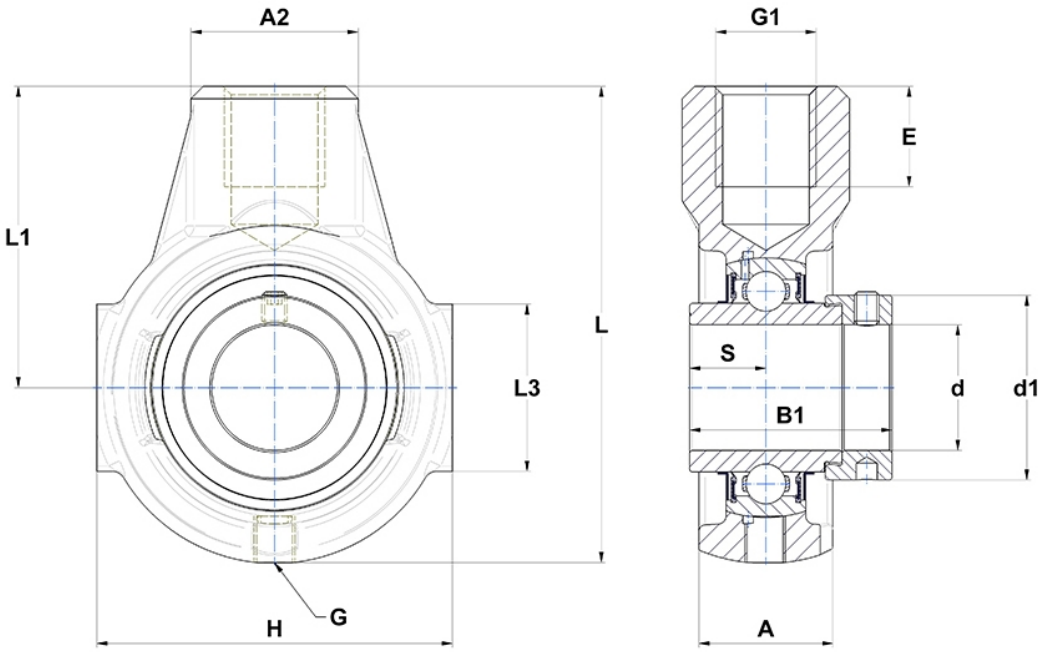


## Product definition

| | |
|---|---|
| **A** | 25 mm |
| **A2** | 30 mm |
| **B** | 34 mm |
| **A5** | 17 mm |
| **B1** | 43.5 mm |
| **d** | 17 mm |
| **d1** | 32.4 mm |
| **E** | 21 mm |
| **G** | R1/8" |
| **G1** | M16 |
| **H** | 65 mm |
| **H** | 65 mm |
| **L** | 91 mm |
| **L1** | 58 mm |
| **L3** | 38 mm |
| **s1** | 30.5 mm |
| **S** | 17 mm |
| **SW** | 3 mm |

## Product performance

| | |
|---|---|
| **C** | 12.8 kN |
| **C0** | 6.65 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 0.65 kg |
| **Recommended tightening torque for set screw** | 5.5 Nm |
| **Designation of housing** | EHE204- |
| **Designation of bearing** | EX203G2 |