
# Technical data


## EXFCE.206L3

Bearing units

grey cast housing, radial insert ball bearing with eccentric locking collar, triple lip seal



## Visual(s)

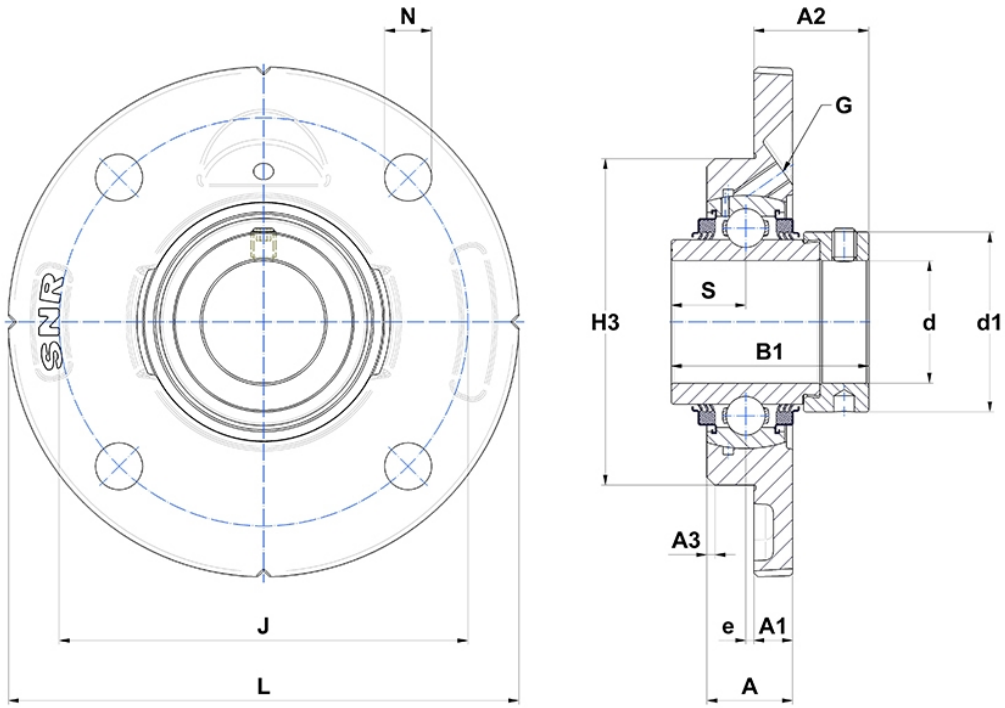


## Product definition

| | |
|---|---|
| **B** | 36.4 mm |
| **A** | 21 mm |
| **A1** | 9.5 mm |
| **A2** | 28.1 mm |
| **B1** | 48.3 mm |
| **d** | 30 mm |
| **d1** | 44.1 mm |
| **e** | -2 mm |
| **G** | M6x1 |
| **H3** | 80 |
| **J** | 100 mm |
| **L** | 125 mm |
| **N** | 11,5mm |
| **s1** | 34.1 mm |
| **S** | 18.2 mm |

## Product performance

| | |
|---|---|
| **C** | 19.5 kN |
| **C0** | 11.2 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 1.11 kg |
| **Recommended tightening torque for set screw** | 11.5 Nm |
| **Designation of housing** | FCE206- |
| **Designation of bearing** | EX206G2L3 |