
# Technical data


## EXFE207-23

Bearing units



grey cast housing, radial insert ball bearing with eccentric locking collar, seal with slinger

## Visual(s)

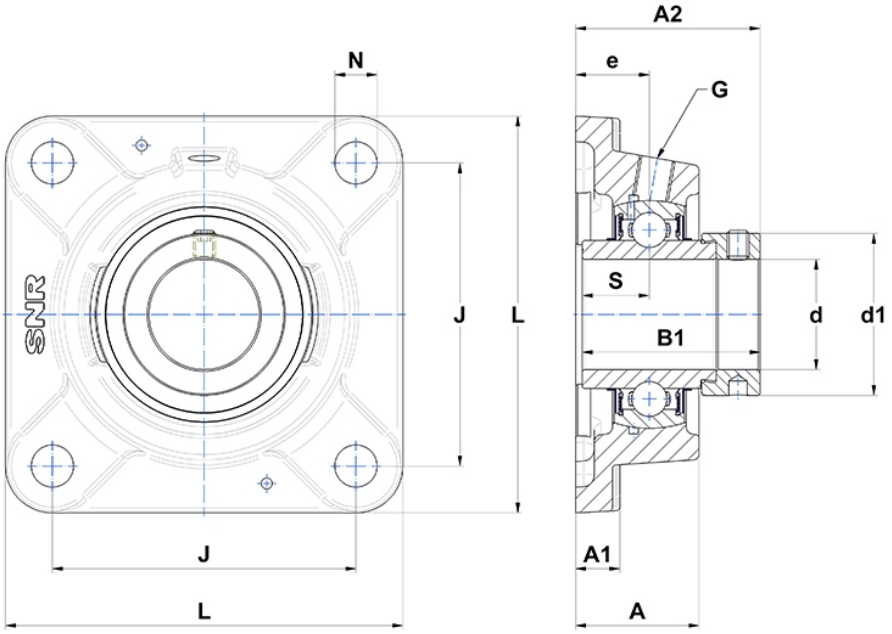


## Product definition

| | |
|---|---|
| **B** | 37.6 mm |
| **A** | 36 mm |
| **A1** | 12.5 mm |
| **A2** | 53.3 mm |
| **B1** | 51.1 mm |
| **d** | 36.51 mm |
| **d1** | 51.1 mm |
| **e** | 21 mm |
| **G** | R1/8" |
| **J** | 92 mm |
| **L** | 118 mm |
| **N** | 14mm |
| **s1** | 36.3 mm |
| **S** | 18.8 mm |

## Product performance

| | |
|---|---|
| **C** | 25.7 kN |
| **C0** | 15.2 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 1.68 kg |
| **Recommended tightening torque for set screw** | 8 Nm |
| **Designation of housing** | FE207- |
| **Designation of bearing** | EX207-23G2 |