
# Technical data

## EXFL209L3

Bearing units

grey cast housing, radial insert ball bearing with eccentric locking collar, triple lip seal

## Visual(s)

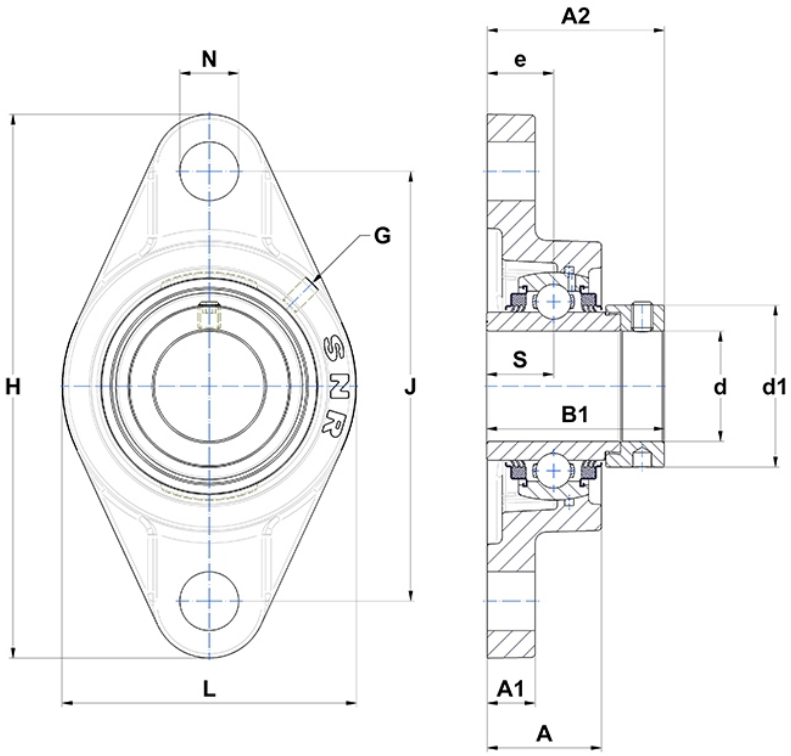


## Product definition

| | |
|---|---|
| **B** | 42.8 mm |
| **A** | 38 mm |
| **A1** | 16 mm |
| **A2** | 56.9 mm |
| **B1** | 56.3 mm |
| **d** | 45 mm |
| **d1** | 62 mm |
| **e** | 22 mm |
| **G** | M6x1 |
| **H** | 188 mm |
| **H** | 188 mm |
| **J** | 148 mm |
| **L** | 108 mm |
| **N** | 19mm |
| **s1** | 39.7 mm |
| **S** | 21.4 mm |

## Product performance

| | |
|---|---|
| **C** | 31.85 kN |
| **C0** | 20.8 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 2.07 kg |
| **Recommended tightening torque for set screw** | 11.5 Nm |
| **Designation of housing** | FL209- |
| **Designation of bearing** | EX209G2L3 |