
# Technical data


## EXFL211N

Bearing units



grey cast housing, radial insert ball bearing with eccentric locking collar, seal with slinger

## Visual(s)

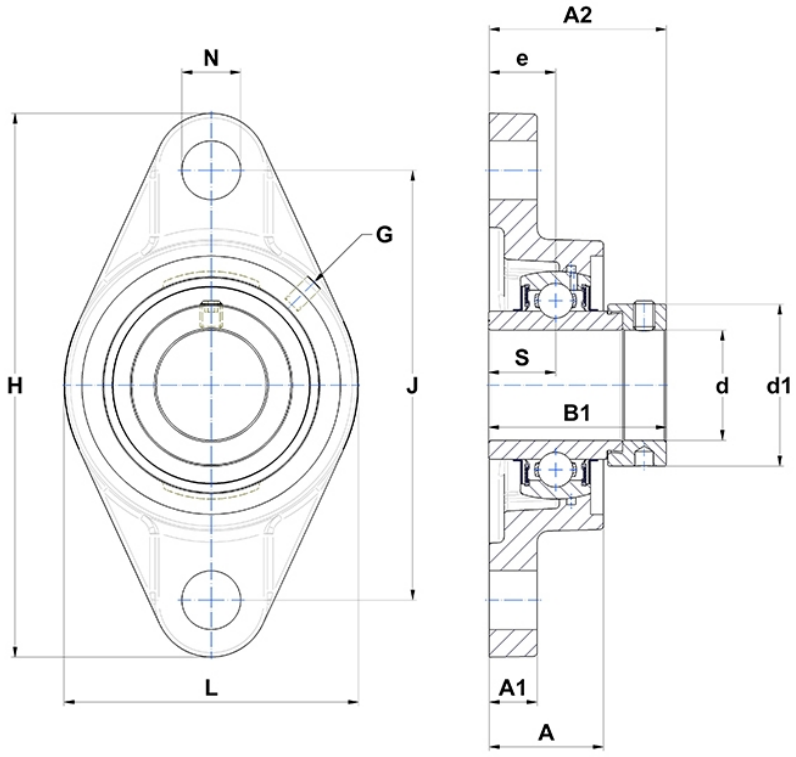

## Product definition

| | |
|---|---|
| **B** | 55.4 mm |
| **A** | 43 mm |
| **A1** | 18 mm |
| **A2** | 68.6 mm |
| **B1** | 71.3 mm |
| **d** | 55 mm |
| **d1** | 74.5 mm |
| **e** | 25 mm |
| **G** | M6x1 |
| **H** | 224 mm |
| **H** | 224 mm |
| **J** | 184 mm |
| **L** | 130 mm |
| **N** | 19mm |
| **s1** | 48.4 mm |
| **S** | 27.7 mm |
| **Z** | 39.2 mm |

## Product performance

| | |
|---|---|
| **C** | 43.55 kN |
| **C0** | 29.2 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 3.19 kg |
| **Recommended tightening torque for set screw** | 22 Nm |
| **Designation of housing** | FL211N- |
| **Designation of bearing** | EX211G2 |