
# Technical data


## EXFL.317

Bearing units



grey cast housing, radial insert ball bearing with eccentric locking collar, seal with slinger

## Visual(s)

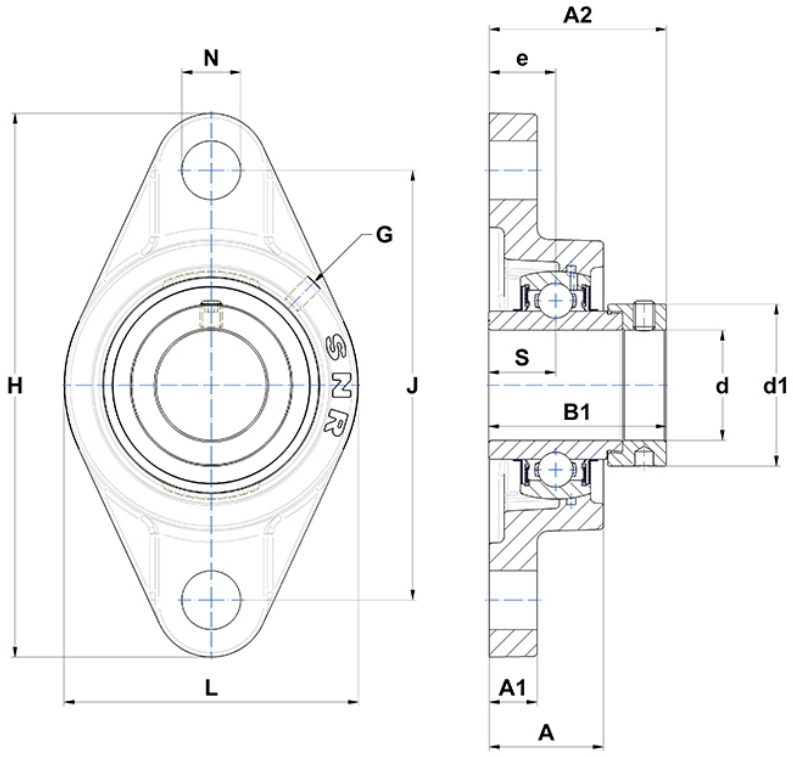

## Product definition

| | |
|---|---|
| **B** | 84.1 mm |
| **A** | 74 mm |
| **A1** | 32 mm |
| **A2** | 111.5 mm |
| **B1** | 109.5 mm |
| **d** | 85 mm |
| **d1** | 127 mm |
| **e** | 44 mm |
| **G** | M10x1 |
| **H** | 370 mm |
| **H** | 370 mm |
| **J** | 300 mm |
| **L** | 220 mm |
| **N** | 38mm |
| **s1** | 73.85 mm |
| **S** | 42 mm |

## Product performance

| | |
|---|---|
| **C** | 132.6 kN |
| **C0** | 96.5 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 15.46 kg |
| **Recommended tightening torque for set screw** | 64 Nm |
| **Designation of housing** | FL317- |
| **Designation of bearing** | EX317G2 |