
## Technical data


# EXFLZ210T20

Bearing units



grey cast housing, radial insert ball bearing with eccentric locking collar, labyrinth seal, for high-temp. applications

## Visual(s)

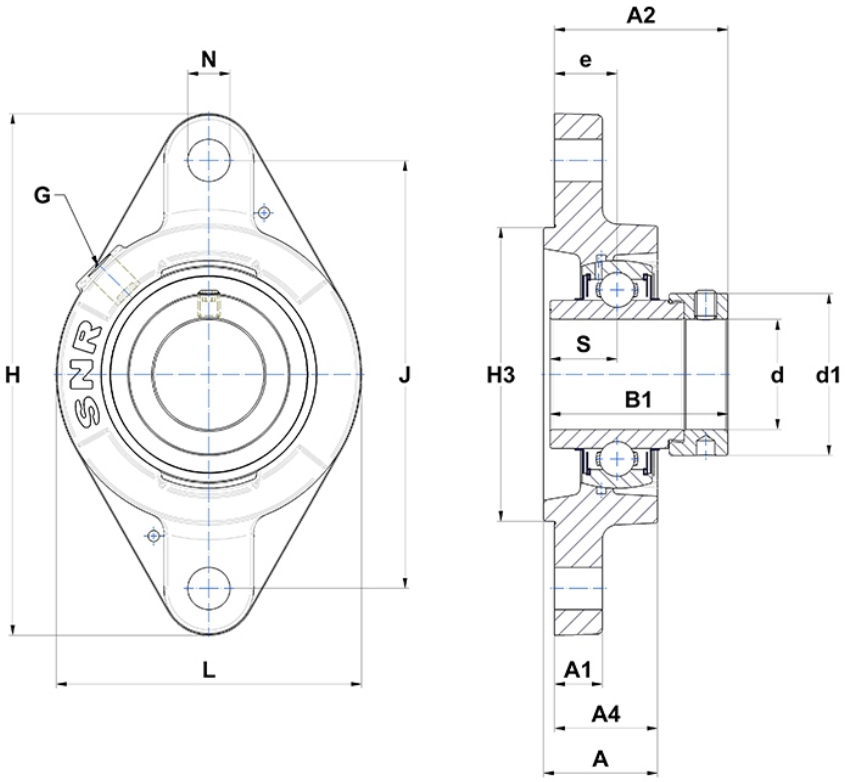

## Product definition

| | |
|---|---|
| **B** | 49.2 mm |
| **A** | 41 mm |
| **A1** | 13 mm |
| **A2** | 62.1 mm |
| **A4** | 37 mm |
| **B1** | 62.7 mm |
| **d** | 50 mm |
| **d1** | 67.2 mm |
| **e** | 24 mm |
| **G** | R1/8" |
| **H** | 190 mm |
| **H** | 190 mm |
| **H3** | 105 |
| **J** | 157 mm |
| **L** | 116 mm |
| **N** | 14mm |
| **s1** | 42.9 mm |
| **S** | 24.6 mm |

## Product performance

| | |
|---|---|
| **C** | 35.1 kN |
| **C0** | 23.2 kN |
| **T min.** | -20 °C |
| **T max.** | 200 °C |

## Other features

| | |
|---|---|
| **Weight** | 2.31 kg |
| **Recommended tightening torque for set screw** | 11.5 Nm |
| **Designation of housing** | FLZ210- |
| **Designation of bearing** | EX210G2T20 |