
# Technical data


## EXFS.319

Bearing units



grey cast housing, radial insert ball bearing with eccentric locking collar, seal with slinger

## Visual(s)

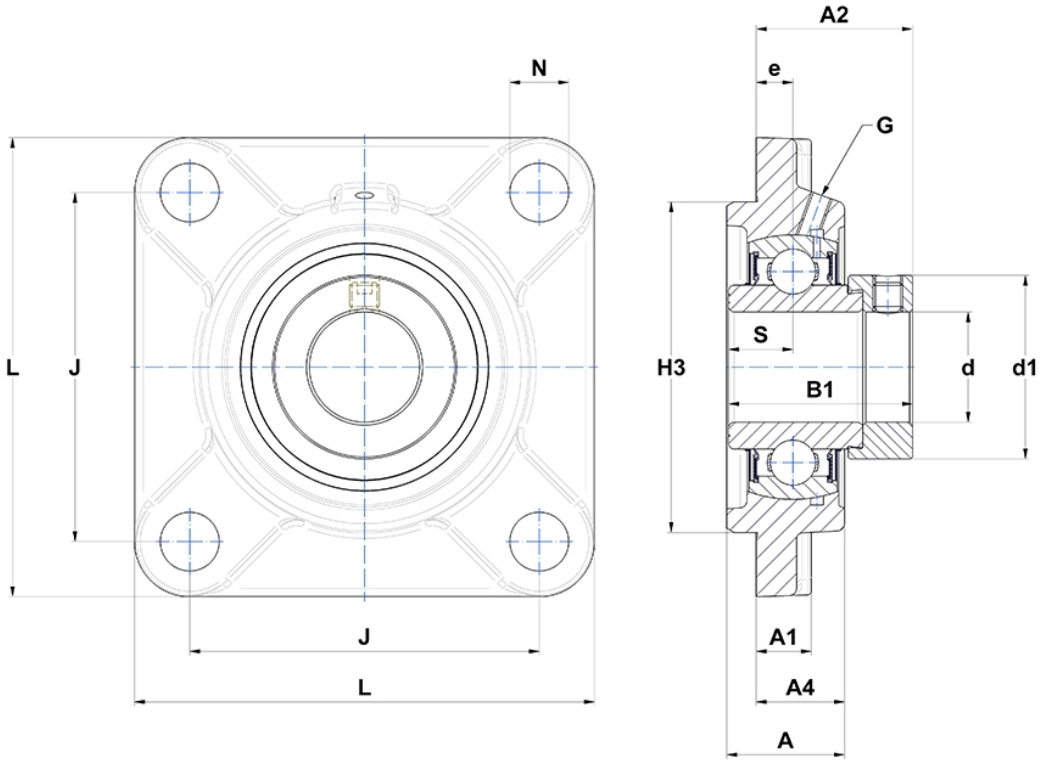

## Product definition

| | |
|---|---|
| **B** | 93.7 mm |
| **A** | 94 mm |
| **A1** | 30 mm |
| **A2** | 114.5 mm |
| **A4** | 74 mm |
| **B1** | 122.3 mm |
| **d** | 95 mm |
| **d1** | 140 mm |
| **e** | 39 mm |
| **G** | M10x1 |
| **H3** | 250 |
| **J** | 228 mm |
| **L** | 290 mm |
| **N** | 35mm |
| **s1** | 83.35 mm |
| **S** | 46.8 mm |

## Product performance

| | |
|---|---|
| **C** | 156 kN |
| **C0** | 122 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 26.4 kg |
| **Recommended tightening torque for set screw** | 120 Nm |
| **Designation of housing** | FS319- |
| **Designation of bearing** | EX319G2 |