
# Technical data


## EXPA.202

Bearing units



grey cast housing, radial insert ball bearing with eccentric locking collar, seal with slinger

## Visual(s)

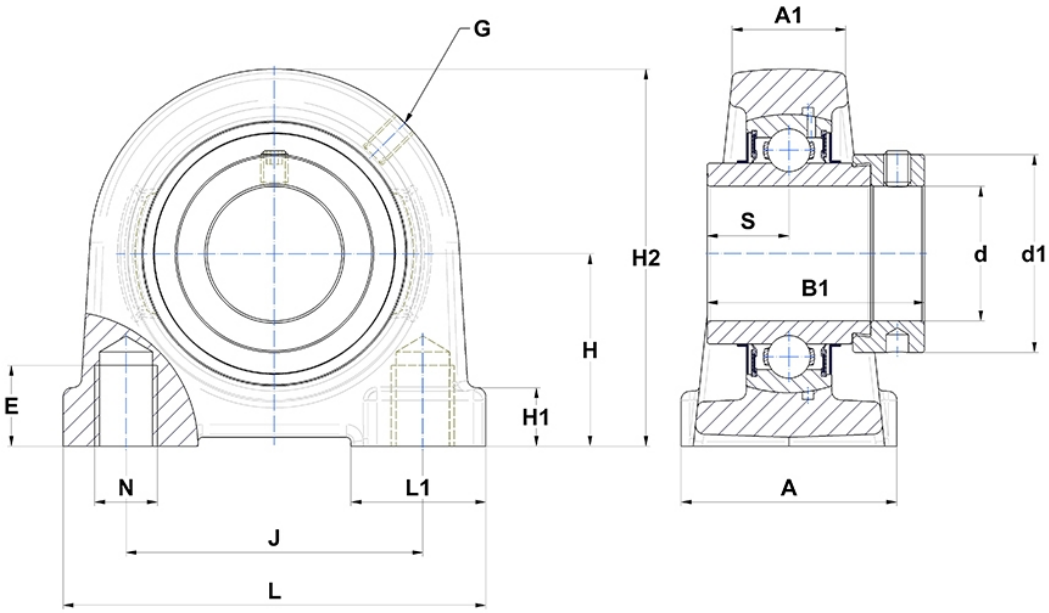

## Product definition

| | |
|---|---|
| **A** | 40 mm |
| **A1** | 22 mm |
| **B** | 34 mm |
| **B1** | 43.5 mm |
| **d** | 15 mm |
| **d1** | 32.4 mm |
| **E** | 13 mm |
| **G** | M6x1 |
| **H** | 30.2 mm |
| **H1** | 11 mm |
| **H2** | 62 mm |
| **J** | 52 mm |
| **L** | 76 mm |
| **L1** | 22 mm |
| **N** | M10 |
| **s1** | 30.5 mm |
| **S** | 17 mm |

## Product performance

| | |
|---|---|
| **C** | 12.8 kN |
| **C0** | 6.65 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 0.67 kg |
| **Recommended tightening torque for set screw** | 5.5 Nm |
| **Designation of housing** | PA204- |
| **Designation of bearing** | EX202G2 |