
## Technical data


# EXPAE.207L3

Bearing units



grey cast housing, radial insert ball bearing with eccentric locking collar, triple lip seal

## Visual(s)

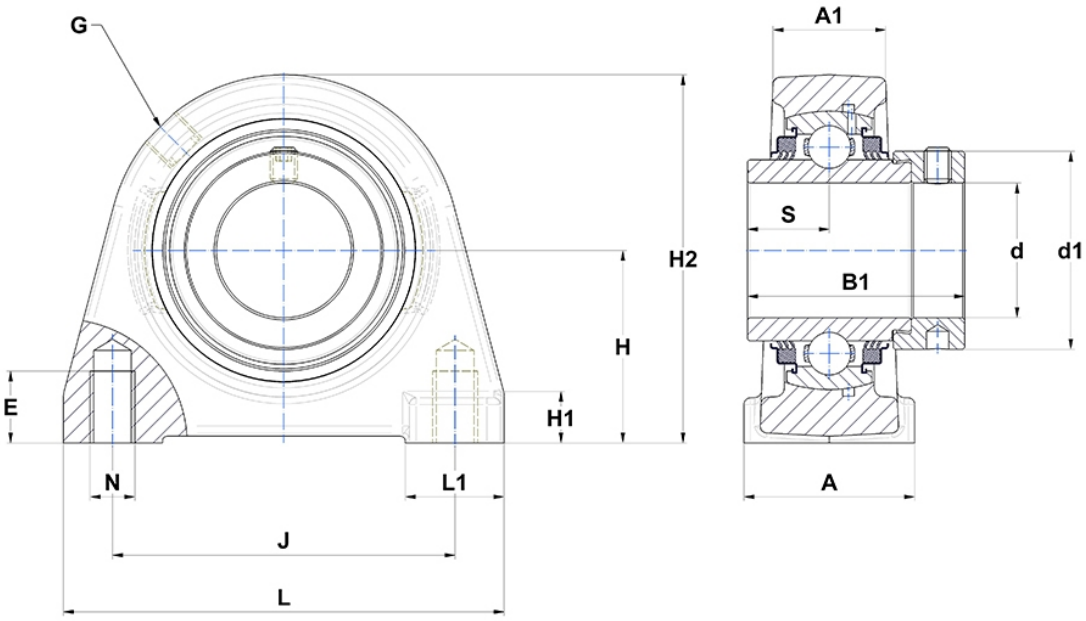

## Product definition

| | |
|---|---|
| **A** | 45 mm |
| **A1** | 27 mm |
| **B** | 37.6 mm |
| **B1** | 51.1 mm |
| **d** | 35 mm |
| **d1** | 51.1 mm |
| **E** | 12.5 mm |
| **G** | R1/8" |
| **H** | 47.6 mm |
| **H1** | 12 mm |
| **H2** | 93 mm |
| **J** | 82.6 mm |
| **L** | 103 mm |
| **L1** | 22.5 mm |
| **N** | M10 |
| **s1** | 36.3 mm |
| **S** | 18.8 mm |

## Product performance

| | |
|---|---|
| **C** | 25.7 kN |
| **C0** | 15.2 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 1.5 kg |
| **Recommended tightening torque for set screw** | 11.5 Nm |
| **Designation of housing** | PAE207- |
| **Designation of bearing** | EX207G2L3 |