
# Technical data


## EXPAE212

Bearing units



grey cast housing, radial insert ball bearing with eccentric locking collar, seal with slinger

## Visual(s)

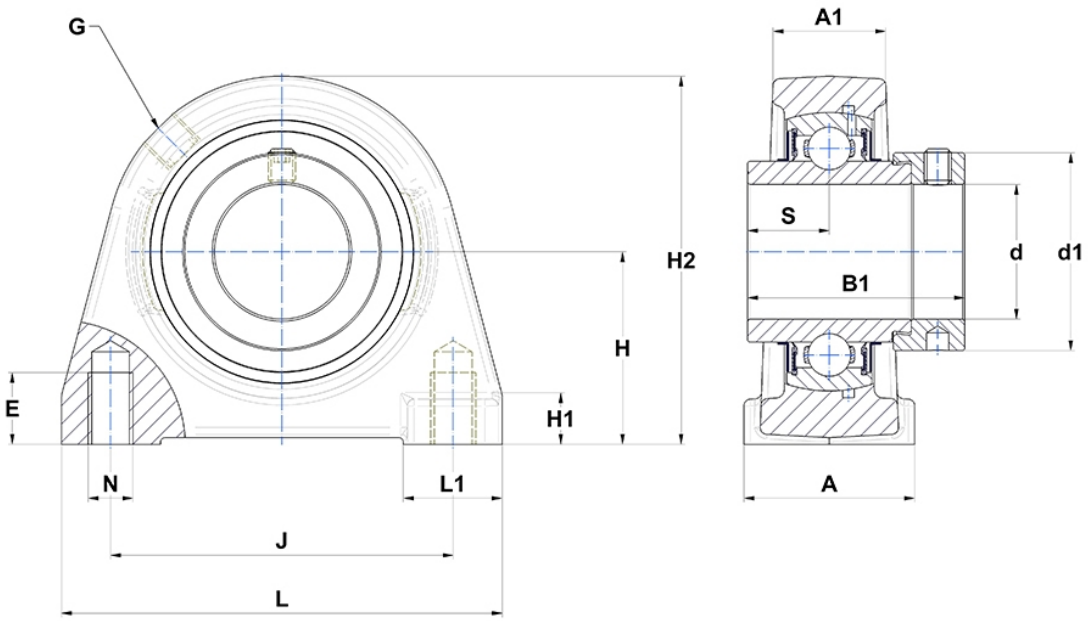

## Product definition

| | |
|---|---|
| **A** | 60 mm |
| **A1** | 42 mm |
| **B** | 61.8 mm |
| **B1** | 77.7 mm |
| **d** | 60 mm |
| **d1** | 82 mm |
| **E** | 20 mm |
| **G** | R1/8" |
| **H** | 69.9 mm |
| **H1** | 16 mm |
| **H2** | 140 mm |
| **J** | 118 mm |
| **L** | 150 mm |
| **L1** | 32 mm |
| **N** | M16 |
| **s1** | 53.2 mm |
| **S** | 30.9 mm |

## Product performance

| | |
|---|---|
| **C** | 52.5 kN |
| **C0** | 32.8 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 4.57 kg |
| **Recommended tightening torque for set screw** | 22 Nm |
| **Designation of housing** | PAE212- |
| **Designation of bearing** | EX212G2 |