
# Technical data


## EXPE.201

Bearing units



grey cast housing, radial insert ball bearing with eccentric locking collar, seal with slinger

## Visual(s)

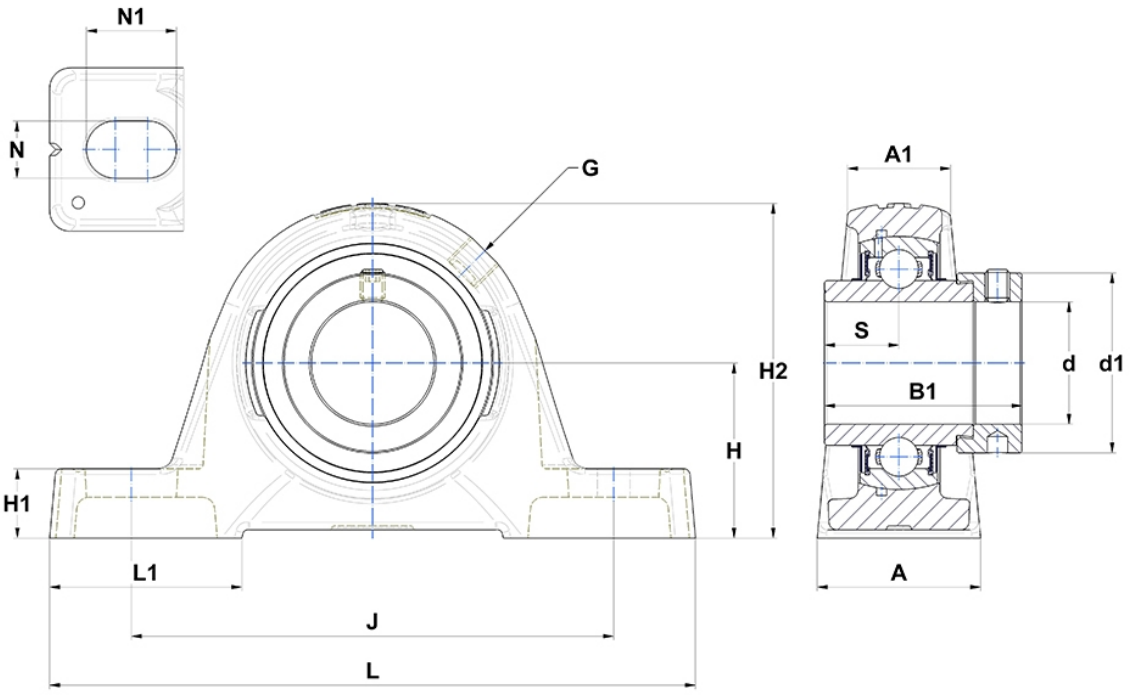

## Product definition

| | |
|---|---|
| **A** | 32 mm |
| **A1** | 19 mm |
| **B** | 34 mm |
| **B1** | 43.5 mm |
| **d** | 12 mm |
| **d1** | 32.4 mm |
| **G** | R1/8" |
| **H** | 33.3 mm |
| **H1** | 14.5 mm |
| **H2** | 64 mm |
| **J** | 97 mm |
| **L** | 130 mm |
| **L1** | 40 mm |
| **N** | 11mm |
| **N1** | 19 mm |
| **s1** | 30.5 mm |
| **S** | 17 mm |

## Product performance

| | |
|---|---|
| **C** | 12.8 kN |
| **C0** | 6.65 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 0.69 kg |
| **Recommended tightening torque for set screw** | 5.5 Nm |
| **Designation of housing** | PE204- |
| **Designation of bearing** | EX201G2 |