
# Technical data

## EXT208

Bearing units

grey cast housing, radial insert ball bearing with eccentric locking collar, seal with slinger

## Visual(s)

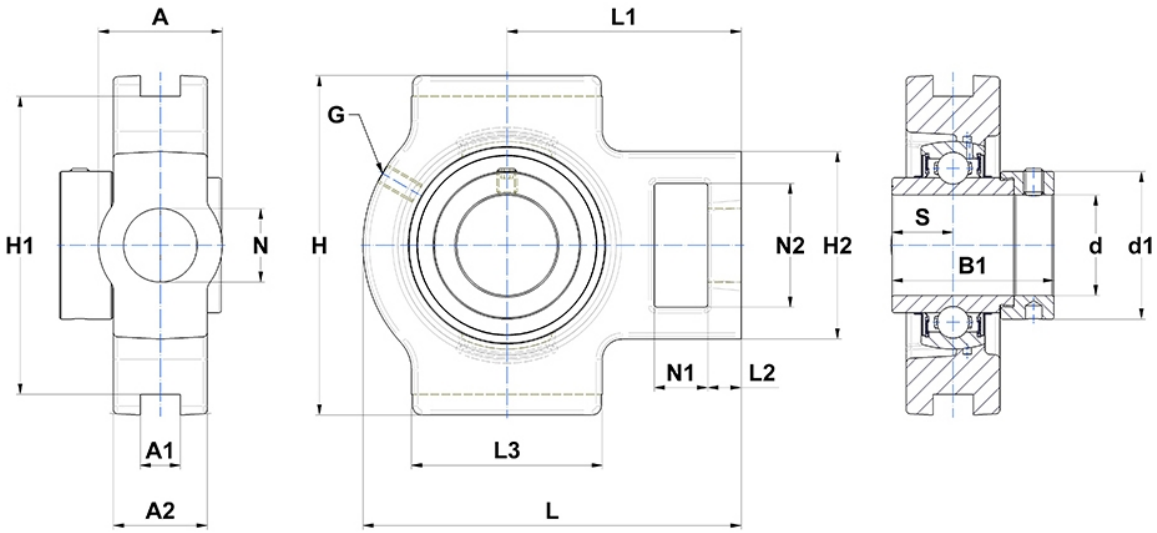

## Product definition

| | |
|---|---|
| **A** | 49 mm |
| **A1** | 16 mm |
| **A2** | 33 mm |
| **B** | 42.8 mm |
| **A5** | 21.4 mm |
| **B1** | 56.3 mm |
| **d** | 40 mm |
| **d1** | 58 mm |
| **G** | M6x1 |
| **H** | 114 mm |
| **H1** | 102 mm |
| **H2** | 83 mm |
| **H** | 114 mm |
| **L** | 144 mm |
| **L1** | 88 mm |
| **L2** | 16 mm |
| **L3** | 83 mm |
| **N** | 29mm |
| **N1** | 19 mm |
| **N2** | 49 mm |
| **s1** | 39.7 mm |
| **S** | 21.4 mm |
| **SW** | 4 mm |

## Product performance

| | |
|---|---|
| **C** | 29.6 kN |
| **C0** | 18.2 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 2.48 kg |
| **Recommended tightening torque for set screw** | 11.5 Nm |
| **Designation of housing** | T208- |
| **Designation of bearing** | EX208G2 |