
# Technical data


## EXT212

Bearing units



grey cast housing, radial insert ball bearing with eccentric locking collar, seal with slinger

## Visual(s)

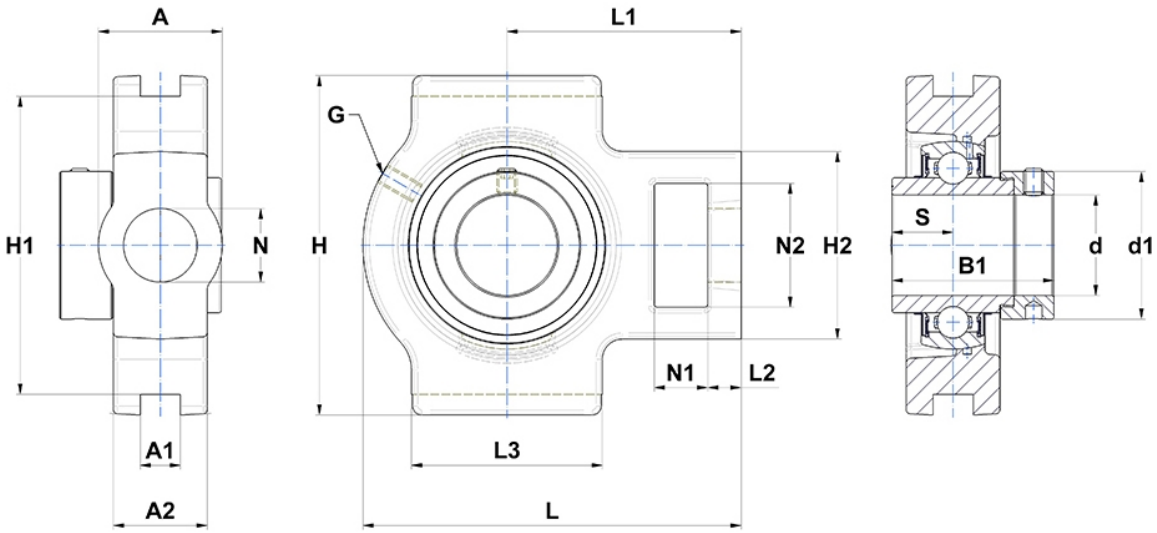

## Product definition

| | |
|---|---|
| **A** | 64 mm |
| **A1** | 22 mm |
| **A2** | 42 mm |
| **B** | 61.8 mm |
| **A5** | 30.9 mm |
| **B1** | 77.7 mm |
| **d** | 60 mm |
| **d1** | 82 mm |
| **G** | M6x1 |
| **H** | 146 mm |
| **H1** | 130 mm |
| **H2** | 102 mm |
| **H** | 146 mm |
| **L** | 194 mm |
| **L1** | 119 mm |
| **L2** | 19 mm |
| **L3** | 102 mm |
| **N** | 35mm |
| **N1** | 32 mm |
| **N2** | 64 mm |
| **s1** | 53.2 mm |
| **S** | 30.9 mm |
| **SW** | 5 mm |

## Product performance

| | |
|---|---|
| **C** | 52.5 kN |
| **C0** | 32.8 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 5.07 kg |
| **Recommended tightening torque for set screw** | 22 Nm |
| **Designation of housing** | T212- |
| **Designation of bearing** | EX212G2 |