# Technical data


## MUCFPL208-24

Bearing units



Thermoplastic housing stainless steel insert ball bearing with socket set screws, seal with slinger, food grease

## Visual(s)

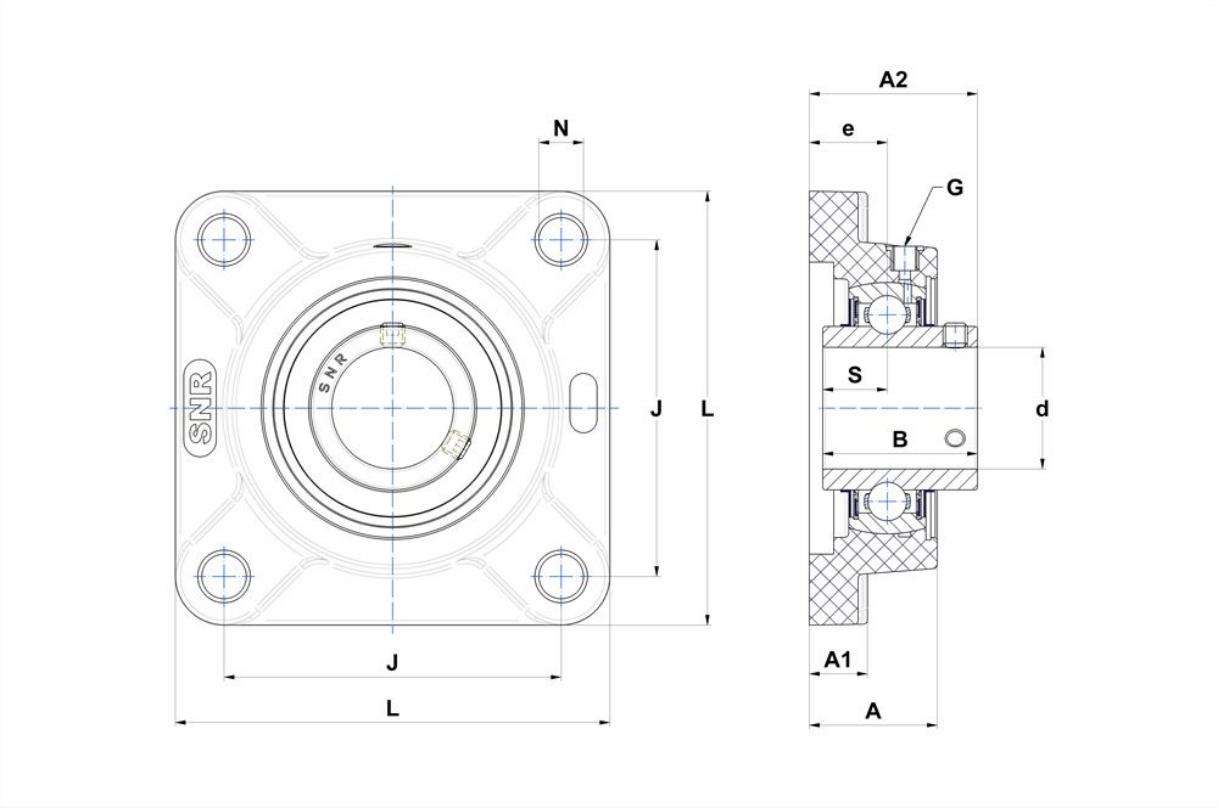


## Product definition

| | |
|---|---|
| **B** | 49.2 mm |
| **A** | 37.5 mm |
| **A1** | 17 mm |
| **A2** | 53.2 mm |
| **d** | 38.1 mm |
| **e** | 23 mm |
| **G** | 1/4"-28 |
| **J** | 102 mm |
| **L** | 130 mm |
| **N** | 14mm |
| **s1** | 24.6 mm |
| **S** | 19 mm |

## Product performance

| | |
|---|---|
| **C** | 24.9 kN |
| **C0** | 14.3 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 0.62 kg |
| **Recommended tightening torque for set screw** | 8.3 Nm |
| **Designation of housing** | FPL208- |
| **Designation of bearing** | MUC208-24FD |