Technical datasheet


NU.221.E.G15.C3


Single row cylindrical roller bearings



Single row cylindrical roller bearing, floating, separable, polyamide cage

Visual(s)

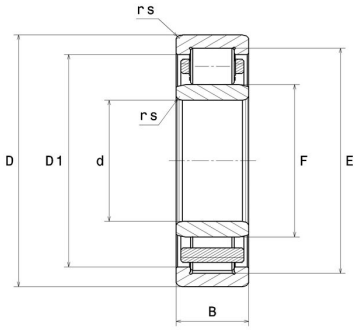

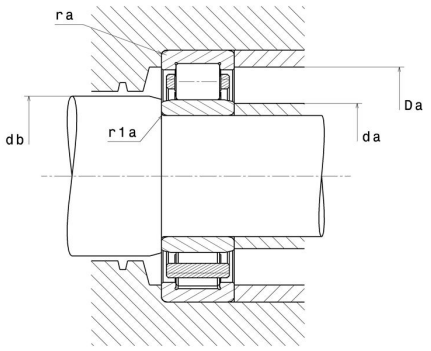

Product definition

d	105 mm
D	190 mm
B	36 mm
E	171.5 mm
F	125.5 mm
D1	165.1 mm
rs min	2.1 mm
r1s min	2.1 mm
Radial clearance class	C3
Mass (without HJ ring)	3.67 kg
Brand	SNR

Product performance

Dynamic load, C	263 kN
Static load, C0	323 kN
Fatigue limit load, Cu	35 kN
Nref	3,400 rpm
Nlim	4,300 rpm
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.42 Hz
Characteristic rolling element frequency, BSF	6.3 Hz
Characteristic outer ring frequency, BPF0	7.18 Hz
Characteristic inner ring frequency, BPFI	9.82 Hz

Abutment dimensions

da min	116 mm
da max	124 mm
Da max	179 mm
ra max	2 mm
r1a max	2 mm

Calculation factors

Equivalent dynamic radial load

$P = Fr$

Equivalent static radial load

$P_0 = Fr$