


# Technical data

## SESF212COE

Bearing units

stainless steel cast housing,stainless steel insert ball bearing with eccentric locking collar, single lip seal, food grease

## Visual(s)

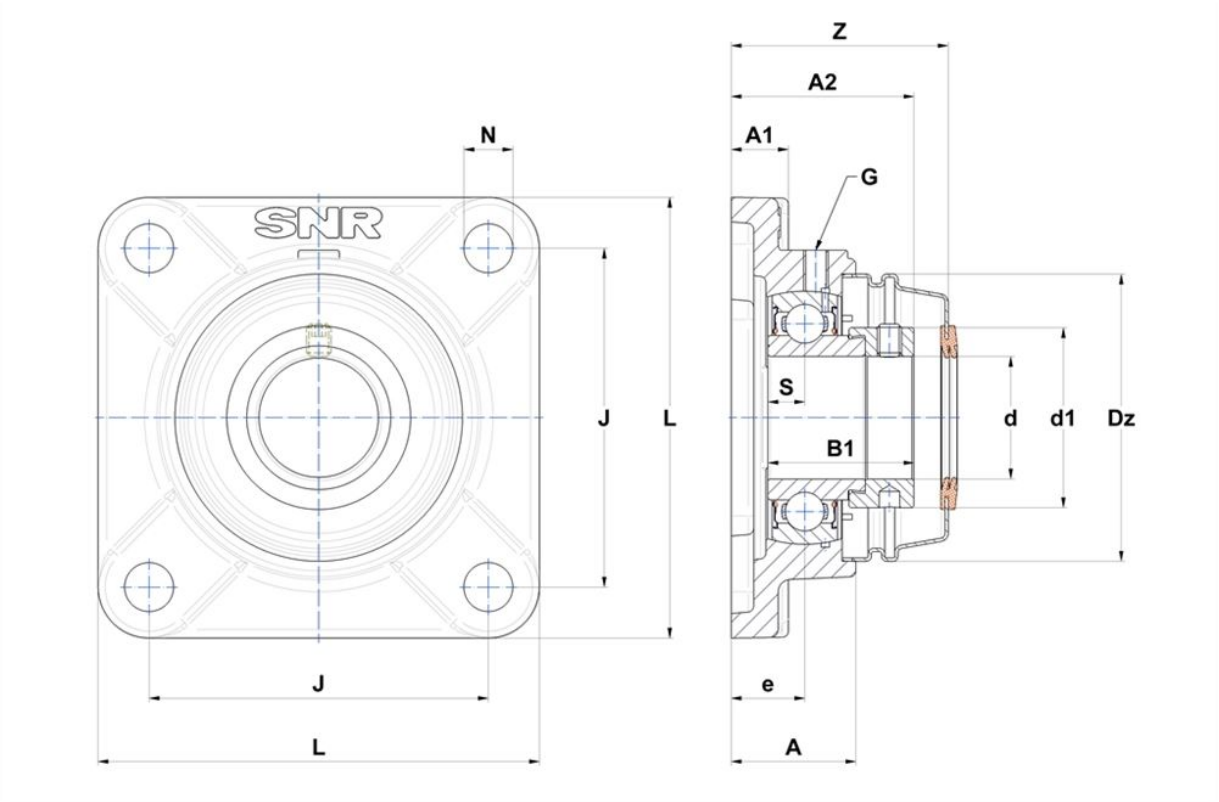

## Product definition

| | |
|---|---|
| **B** | 37.1 mm |
| **A** | 48 mm |
| **A1** | 20 mm |
| **A2** | 71.1 mm |
| **B1** | 53.1 mm |
| **d** | 60 mm |
| **d1** | 84.2 mm |
| **Dz** | 120 mm |
| **e** | 29 mm |
| **G** | M6x1 |
| **J** | 143 mm |
| **L** | 175 mm |
| **N** | 19mm |
| **s1** | 40.85 mm |
| **S** | 11 mm |
| **Z** | 82.7 mm |

## Product performance

| | |
|---|---|
| **C** | 41 kN |
| **C0** | 31.5 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 5.75 kg |
| **Recommended tightening torque for set screw** | 18.7 Nm |
| **Designation of housing** | SF212N- |
| **Designation of bearing** | SES212 |
| **Designation of open end cover** | SCOE212-60 |